
Service Manual

Service Parts & Diagrams

HDS-14

BendPak SKU 5260510 HDS-14 Four-Post Car Lift Version C 02/25/2016

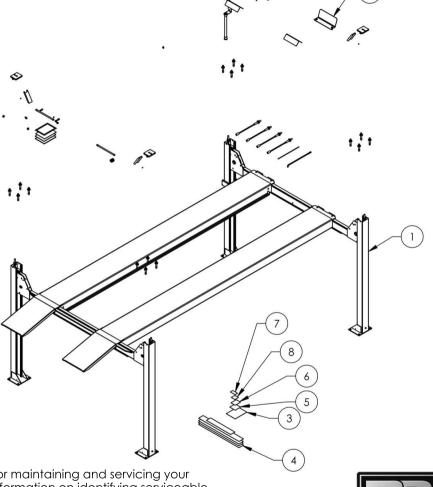

This guide is a troubleshooting reference used for maintaining and servicing your BendPak product. It provides comprehensive information on identifying serviceable parts and components and assists in troubleshooting problems and performing assembly/disassembly procedures.



BendPak, Inc. Corporate Office

1645 Lemonwood Drive Santa Paula, CA 93060 USA Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 info@bendpak.com

Customer Service Desk / Warranty

Customer Service Representatives Office Tel: 1-805-933-9970 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 customerservice@bendpak.com

Parts Orders

Customer Service Representatives Office Tel: 1-805-933-9970 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 parts@bendpak.com


Domestic Sales & Service


USA Sales Representatives Office Tel: 1-805-933-9970 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 sales@bendpak.com

International Sales & Service

Office Tel: 1-805-933-9970 Exports Department: 1-805-933-9970 Ext. 192 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 bpkexports@bendpak.com


	REVISION
\$	REV DESCRIPTION DATE EDITED BY ECC ADDED 5905103, 5905200, 5905465, 5905557,
	C 5905940, AND 5930605, UPDATED BOM 08/12/2015 TM 0068
-2	REVISION REPLACED 5930605 WITH 5905953, D REPLACED 5905557 WITH 5905402 12/10/2015 JM 0072 UPDATED BOM REVISIONS UPDATED BOM REVISIONS 12/10/2015 JM 0072
	E REPLACED 5905402 WITH 5905557, UPDATED 12/23/2015 JM 0074
	-1
	ITEM NO PART NUMBER DESCRIPTION QTY RE 1 5245402 HDS-14 LIFT SUPERSTRUCTURE 1 E 2 5250143 PARTS BOX HDS-14 LE 1 E 3 5905103 WARNING ALI/WL 200 1 4 5905200 4 POST DECAL KIT, LESS ALI 1 B 5 5905465 MANUFACTURER LABEL 1 6 5905557 MAX CAP DANGER 14K 1 7 5905940 PRODUCT DATA LABEL 1 8 5905953 SERIAL NUMBER INTERIOR TAG PLATE 1 DO NOT SCALE DRAWING NAME DATE 1645 LEMONWOOD D DIMENSIONS ARE IN MM CHECKED THIRD ANGLE PROJECTION TOTE 1645 LEMONWOOD D
NOTE: UNLESS OTHERWISE SPECIFIED. 1. SEE SHIPPING INSTRUCTIONS FOR FINAL PACKAGING 2. ALL LABELS TO BE APPLIED TO POSTS AFTER PAINTING. 3. SEE ATTACHED LABEL PLACEMENT SHEET	THIRD ANGLE PROJECTION Image: the propertiant and confidential The information contained in this drawing is Image: the sole production in this drawing is Image: the information contained in this drawing is Image

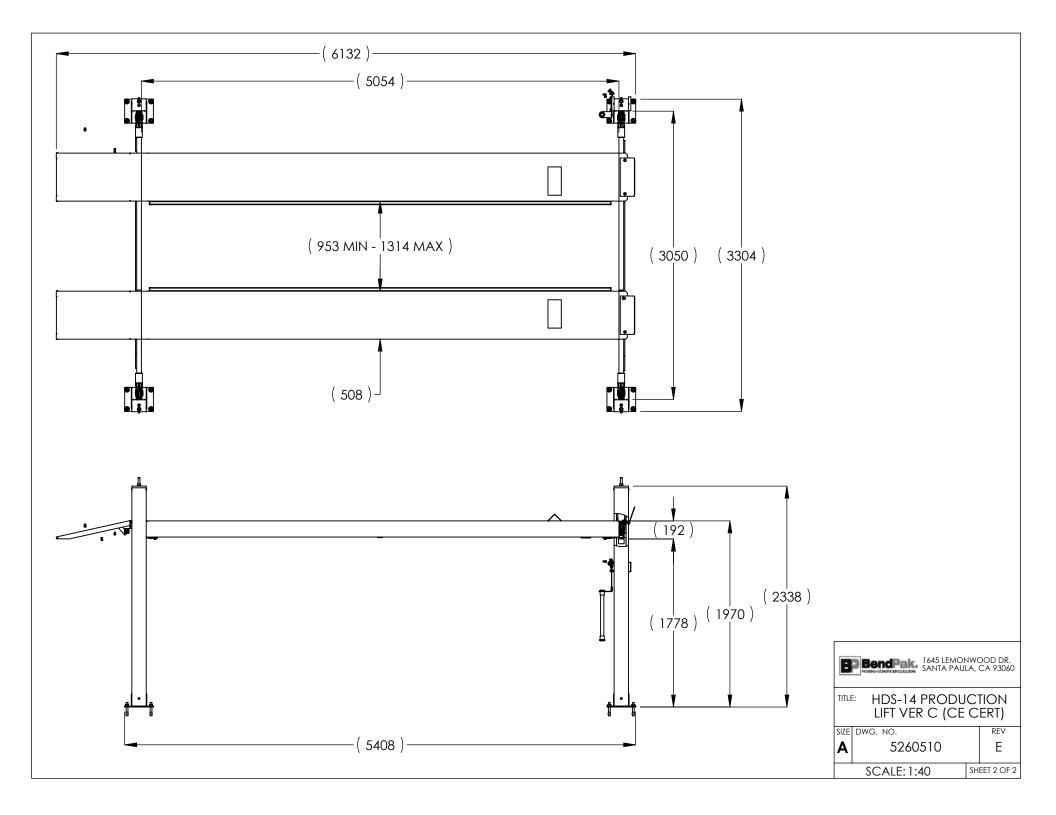

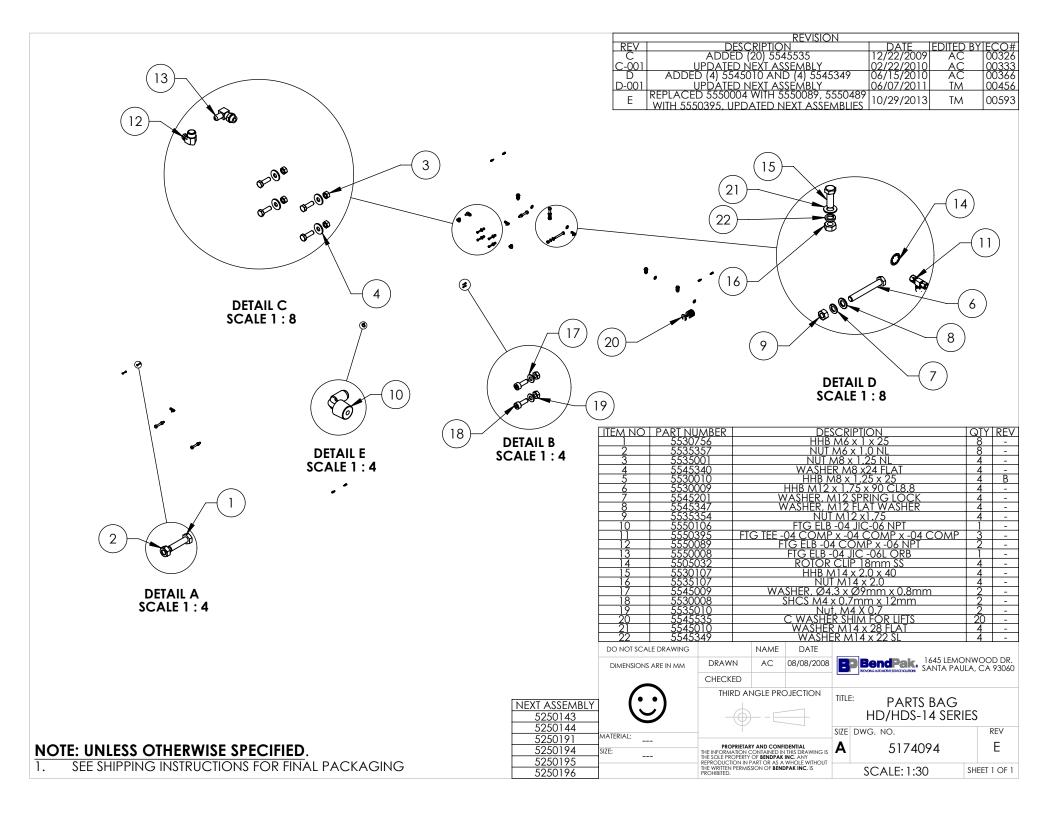


	REVISION			
REV		DATE	EDITED BY	[ECO
K	REMOVED 5535027, 5545007 AND 5505350	01/14/2015	MR	00675
	UPDATED BOM REVISION	03/30/2015	MR	00683
M	REMOVED 5550026	09/30/2015	TM	00724
3		Lo Lo	6 کم 2)


ITEM NO [PART NUMBER] DESCRIPTION	
	QTY REV
Image: Non-International content of the international content of the internation content of the international content of the international conte	1 E
3 5215015 HDS-14 SERIES RAMP SHEAVE ASSEMBLY	6 B
4 5620244 HDS-14 RAMP SHEAVE SHAFT WELDMENT	1 B 1 B
5 5620245 HDS-14 SHAFT WELDMENT, 2 SHEAVE END 6 5736821 HDS-14 CABLE RETAINER PLATE 7 5502110 CYLINDER ASSEMBLY Ø3.5 x 70	
7 5502110 CYLINDER ASSEMBLY Ø3.5 x 70	1 A 1 E
8 5545341 WASHER M10 x Ø20 FLAT 9 5530281 HHB M10 x 1.5 x 10	2 -
DO NOT SCALE DRAWING NAME DATE	
DRAWN GJZ 11/17/2008 EPBendPak. 1645 LEMO	WOOD DR.
CHECKED	
THIRD ANGLE PROJECTION TITLE: HDS-14 POWER S	
NOTE: UNLESS OTHERWISE SPECIFIED.	
1. VERIFY CYLINDER PORTS ARE CAPPED OFF WITH	REV
	м
3. ASSEMBLE ITEMS AS SHOWN. NEXT ASSEMBLY 5245402 Reproduction in PART OR 35 a WHOLE WITHOUT SCALE: 1:25	SHEET 1 OF 2

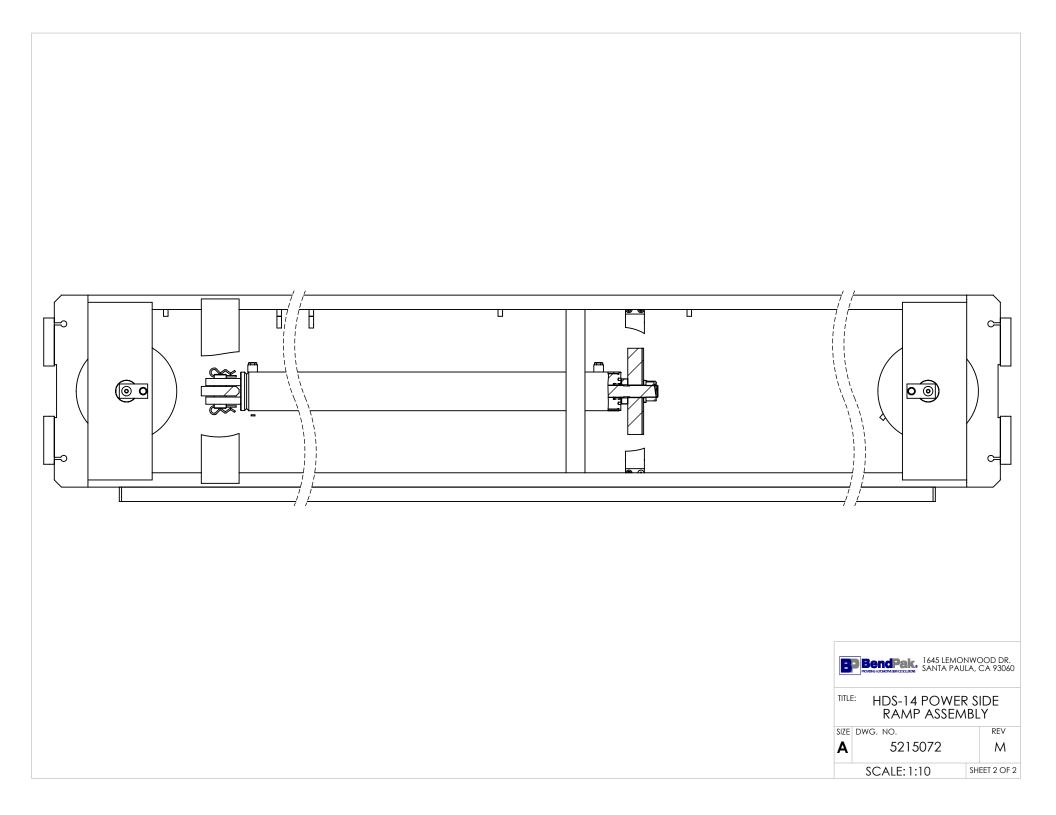

	REVISION			
REV	DESCRIPTION	DATE	EDITED BY	ECO#
D	UPDATED NEXT ASSEMBLY, ADDED 5550486	02/24/2010	AC	00333
D-001	UPDATED NEXT ASSEMBLY	01/21/2011	TM	00439
D-010	UPDATED NEXT ASSEMBLIES	07/24/2013	TM	00611
E	REPLACED 5550481 WITH 5550087	10/29/2013	TM	00593
F	REPLACED 5590240 WITH 5590175, UPDATED NEXT ASSEMBLIES	05/05/2015	MR	00683
	NEXT ASSEMIDLIES			

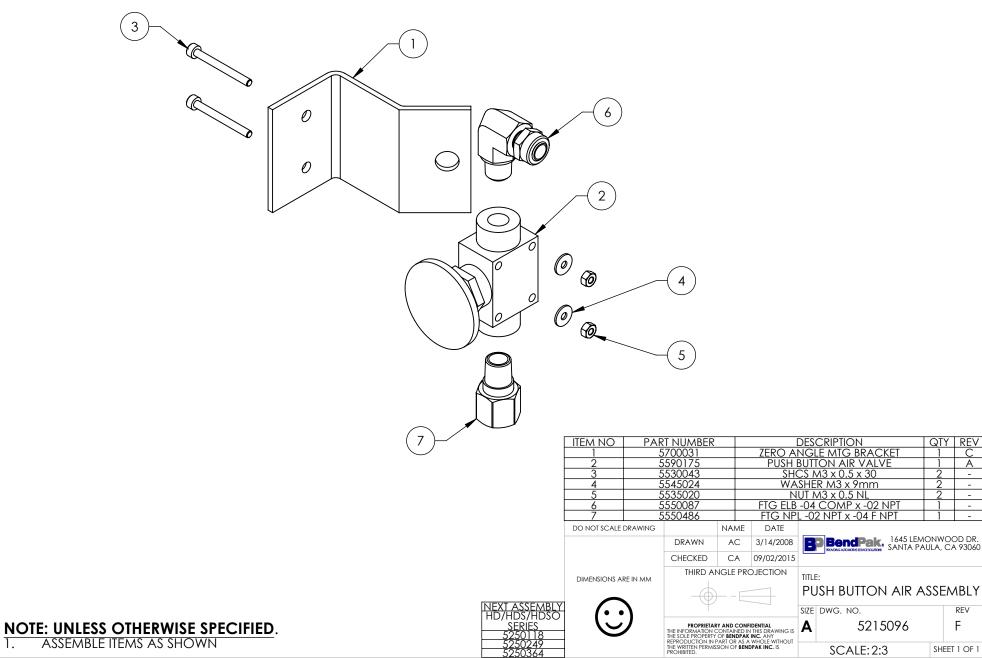

1.

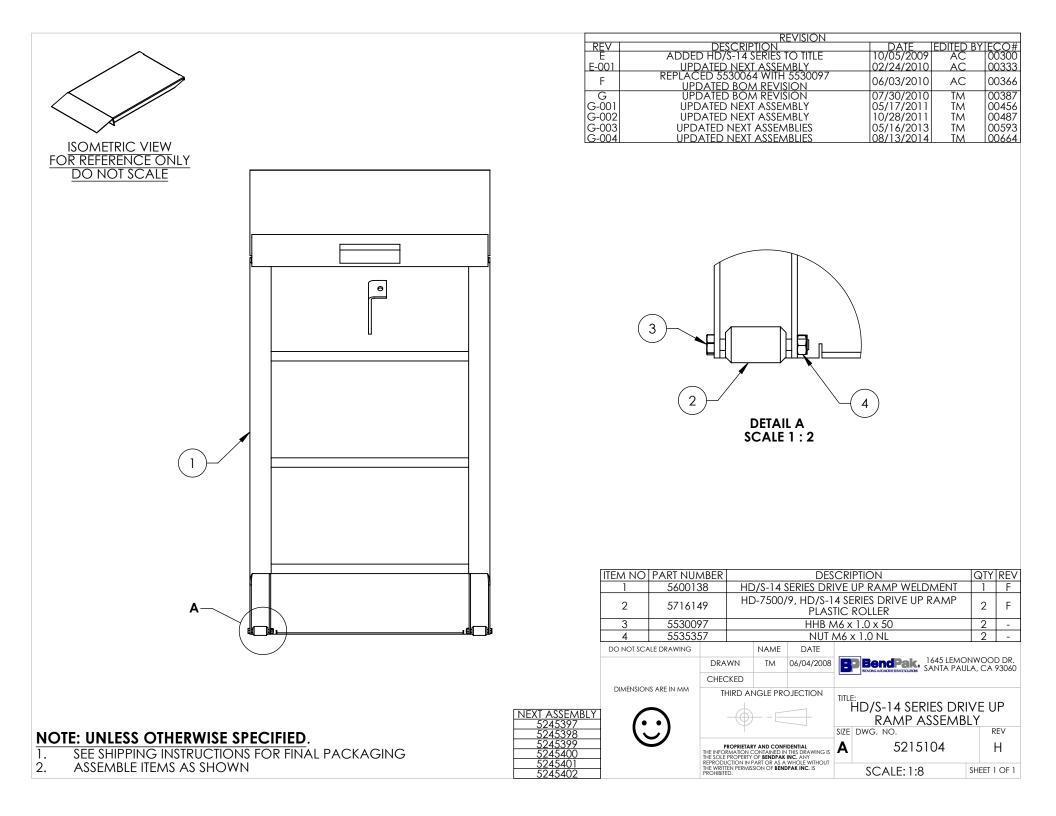



	E REPLACED S	REVISION ESCRIPTION 5545026 WITH 5545005 5550025 AND 5716629 ED BOM REVISIONS	DATE EE 3/23/2015 09/30/2015 01/22/2016	TM	ECO# 00683 00724 00741
24 24 2 16 20 13 21 22 5 5 5 5 5 5 5 5 5 5 5 5 5	ITEM NO PART NUMBER 1 5600276 2 5215013 3 5575380 4 5600044 5 5600173 6 5716005 7 5746008 8 5600760 9 5540275	HDS-14 CROSSTUBE V WINDC HDS-14 CROSSTUBE S HD/HDS/HDO/HDSO-14 HD/HDS LIGHT DUTY SE WELDW HD/S/O-14 SHEAVE HD/7/7500/9/14/HDSO-14 HD/HDS LIGHT DUTY SERI	VELDMENT, LARGE DW HEAVE ASSEMBLY SERIES SLACK SAFE IENT PIN WELDMENT I PLASTIC SLIDE BL HDSO-14 SAFETY P ES SAFETY WELDM	E 1 LLER 2 TY 2 OCK E IN 2 LENT 2	TY REV 1 H 2 B 2 C 2 F 2 G 8 J 2 E 2 B 3 -
	8 3600/80 9 5540275 10 5502195 11 5530005 12 5545005 13 5535112 14 5505030 15 5540002 17 5505625 18 5550087 19 5530093 20 5545032 21 5755136 22 5755137 23 5535357 24 5540070 DO NOT SCALE DRAWING	E RING Ø25mm OI AIR CYLINDER, Ø19 HHB M6 x M6 FLAT W NUT M6 ROTOR CLIP SPRING Ø1.375" OD T FEMALE ROD EN FTG ELB -04 CO HHB M6 x WASHER M36 HD AIR CYLINDER HD AIR CYLINDER HD AIR CYLINDER NUT M6 x SPRING Ø13mm x 89r NAME DATE	1 x 70 (ASHER x 1.0 10mm SS nm, SLACK SAFET RUARC X5133-137 D M6 x 33mm MP x -02 NPT 1 x 20 5 x 66 FLAT SPACER 12mm SPACER 12mm SPACER 25mm 1.0 NL nm, AIR CYLINDEI		$\begin{array}{cccccccccccccccccccccccccccccccccccc$
NOTE: UNLESS OTHERWISE SPECIFIED.1. GREASE PINS PRIOR TO ASSEMBLY2. ASSEMBLE ITEMS AS SHOWN	DIMENSIONS ARE IN MM CHE	THIRD ANGLE PROJECTION THIRD ANGLE PROJECTION THE AS SIZE PROPRIETARY AND CONFIDENTIAL ORMATION CONTAINED IN THIS DRAWING IS DEPROOPERY OF BENDRAK INC. ANY THIS PERSONAL OF BENDRAK INC. ANY THIS PERSONAL OF BENDRAK INC. ANY	HDS-14 CRC SEMBLY, LARG DWG. NO. 5215597 SCALE: 1:20	SSTUBE E WINI	Ē


	DEVI		
	REV C D	DESCRIPTION REPLACED 5545026 WITH 55450 REMOVED 5550025 AND 57160	DATE EDITED BY ECO# 005 3/23/2015 MR 00683 629 09/30/2015 TM 00724
(10) (3) (4)	E	UPDATED BOM REVISIONS	12/28/2015 JM 00741
(9)	16)		
\bigvee	<u> (18)</u>		
	(23)		
	(20)		
	20		
	5		
	24		
	(22)		
	21)		
		NOIPART NUMBER 5600923 HDS-14 CROSSTU 5215013 HDS-14 CRO 5575380 HD/HDS/HDO/1	DESCRIPTION QTY IREV IBE WELDMENT, SMALL WINDOW 1 B DSSTUBE SHEAVE ASSEMBLY 2 B HDSO-14 SERIES SAFETY ROLLER 2 C IT DUTY SERIES CACETY ROLLER 2 C
	3		
DETAIL A	5	5600173 HD/S/O-1 5716005 HD-7/7500/9/14	WELDMENT 2 F 4 SHEAVE PIN WELDMENT 2 G IHDSO-14 PLASTIC SLIDE BLOCK 8 J DUTY SERIES SAFETY WELDMENT 2 B
SCALE 1 : 10	- / - 9 - 9	5600760 HD7HDS LIGHT 5746008 HD7HDS-7775 5502195 AIR CYLIN	DUTY SERIES SAFETY WELDMENT 2 B 00/9/14, HDSO-14 SAFETY PIN 2 E DER, Ø19mm x 25 STROKE 2 - TOR CLIP 10mm SS 2 - ROD END M6 x 33mm 2 -
) <u>5505030</u> RO <u>5505625</u> FEMALE ? 5530005	<u>TOR CLIP 10mm SS</u> <u>2</u> - <u>E ROD END M6 x 33mm 2</u> - HHB M6 x 1 x 70 6 -
		5530093 5535112 5540002 E PINC (211)	HHB M6 x 1 x 20 2 - NUT M6 x 1 0 2 - 375" OD TRUARC X5133-137 2 -
		5600173 HD/S/O-1 5716005 HD-7/7500/9/14 5600760 HD/HDS LIGHT 5746008 HD/HDS-1/750 550502195 AIR CYLIN 5505625 FEMALE 5505030 RO 5535012 S530093 5540002 E RING Ø1.2 5540002 E RING Ø1.2 5540005 N 5540005 N 5540005 N 5540005 N 5540005 N 5540087 FIG AIR CYLIN 5545087 FIG AIR CYLIN	ALE ROD END 1/ 4-28 4 A 25mm OD DIN 6799 0250 8 -
		5 5545005 // 5545032 WA 5550087 FTG EL	A6 FLAT WASHER 4 - SHER M36 x 66 FLAT 2 - B -04 COMP x -02 NPT 2 -
		5/55136 HD AIR C 5755137 HD AIR C 5535357 5540070 SPRING Ø13	SILE M 08 06 1 C1 2 - B -04 COMP x -02 NPT 2 - YLINDER SPACER 12mm 2 B YLINDER SPACER 25mm 2 B NUT M6 x 1.0 NL 6 - mm x 89mm, AIR CYLINDER 2 B
		5540070 SPRING Ø13 DT SCALE DRAWING NAME	ATE
		DRAWN TM 08/18 NSIONS ARE IN MM CHECKED	B/2014 BendPak, 1645 LEMONWOOD DR. NOVERA ADDAME SANTA PAULA, CA 93060
		THIRD ANGLE PROJECT	
			ASSEMBLY, SMALL WINDOW
NOTE: UNLESS OTHERWISE SPECIFIED. 1. GREASE PINS PRIOR TO ASSEMBLY	NEXT ASSEMBLY 5245399 5245400 5245401 5245401 5245402 5245403	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DR	
2. ASSEMBLE ITEMS AS SHOWN	<u>5245401</u> 5245402 5245403	PROPRIEARY AND CONTINUENT IN THIS OR THE INFORMATION CONTINUES IN THIS OR THE SOLE PROPERTY OF BENDPAK INC. ANY REPRODUCTION IN PART OR AS A WHOLE THE WRITEN PRANISSION OF BENDPAK INC PROHIBIED.	SCALE: 1:20 SHEET 1 OF 1


	REVISION REV DESCRIPTION DATE EDITED BY ECO# A PRODUCTION RELEASE, DREIVED FROM 5215033 08/04/2014 TM 00664
	A DETAIL A SCALE 1 : 3
	ITEM NO PART NUMBER DESCRIPTION QTY REV 1 5600924 HDS/HDS0-14 CYLINDER FLANGE ARM 1 A 2 5716006 HD-14 CYL. FLANGE ARM SLIDE 2 D 3 5530077 FHPS M6 x 1 x 25L 4 - 4 5535112 NUT M6 x 1.0 4 - 5 5545005 M6 FLAT WASHER 4 -
NOTE: UNLESS OTHERWISE SPECIFIED.NEXT AS 52131. SEE SHIPPING INSTRUCTIONS FOR FINAL PACKAGING5215 52132. ASSEMBLE ITEMS AS SHOWN5215 5213	5097 THE INFORMATION CONTAINED IN THIS DRAWING IS A 5213004 A

9	REVISION REV DESCRIPTION DATE EDITED BY/ECO# B UPDATED BOM REVISION 01/14/2015 MR 00675 C UPDATED BOM REVISION 03/20/2015 MR 00683 D UPDATED BOM REVISIONS 09/30/2015 TM 00724 ADDED (8) 5545341, (4) 5530167 (4)5746382 12/23/2015 JM 00741 UPDATED BOM REVISIONS UPDATED BOM REVISIONS 12/23/2015 JM 00741
DETAIL A SCALE 1 : 2	
	-5 -5
	ITEM NO PART NUMBER DESCRIPTION QTY REV 1 5215663 HDS-14 CROSSTUBE ASSEMBLY, SMALL WINDOW 1 D 2 5215104 HD/S-14 SERIES DRIVE UP RAMP ASSEMBLY 2 H 3 5215597 HDS-14 CROSSTUBE ASSEMBLY, LARGE WINDOW 1 C 4 5215072 HDS-14 POWER SIDE RAMP ASSEMBLY 1 M 5 5600291 HDS-14 OFF SIDE RAMP ASSEMBLY 1 M 5 5600291 HDS-14 POST WELDMENT 1 D 6 5620236 HDS-14 POST WELDMENT 3 E 7 5620237 HDS-14 SERIES SAFETY LADDER WELDMENT 4 - 10 5535017 NUT M20 x 2.5 NL 4 - 11 5545343 WASHER, M20 FLAT 4 - 12 5545341 WASHER M10 x 0/20 FLAT 8 - 13 5530167 HUT M10 x 1.5 NL 4 - 14 5535013 NUT M10 x 1.5 NL 4 - 13
DETAIL B SCALE 2 : 45 NOTE: UNLESS OTHERWISE SPECIFIED. 1. SEE SHIPPING INSTRUCTIONS FOR FINAL PACKAGING 2. ASSEMBLE ITEMS AS SHOWN	DIMENSIONS ARE IN MM DRAWN TM 08/01/2014 DIMENSIONS ARE IN MM CHECKED Image: Dimension of the state o

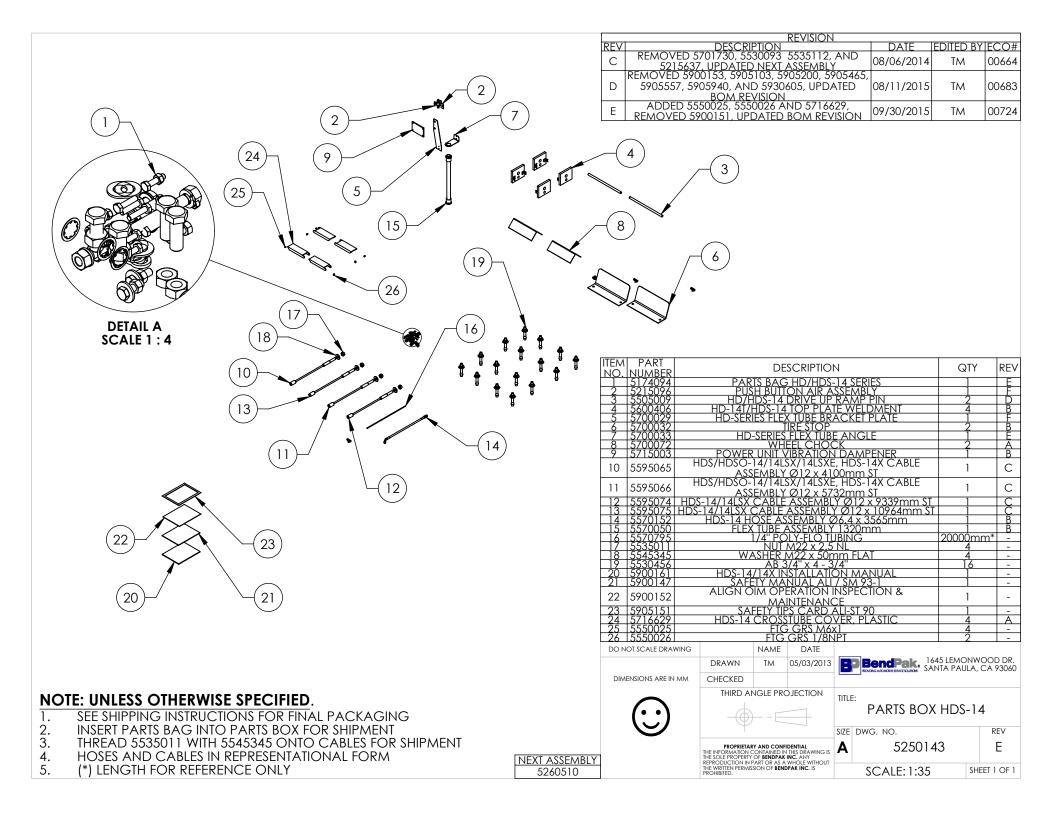

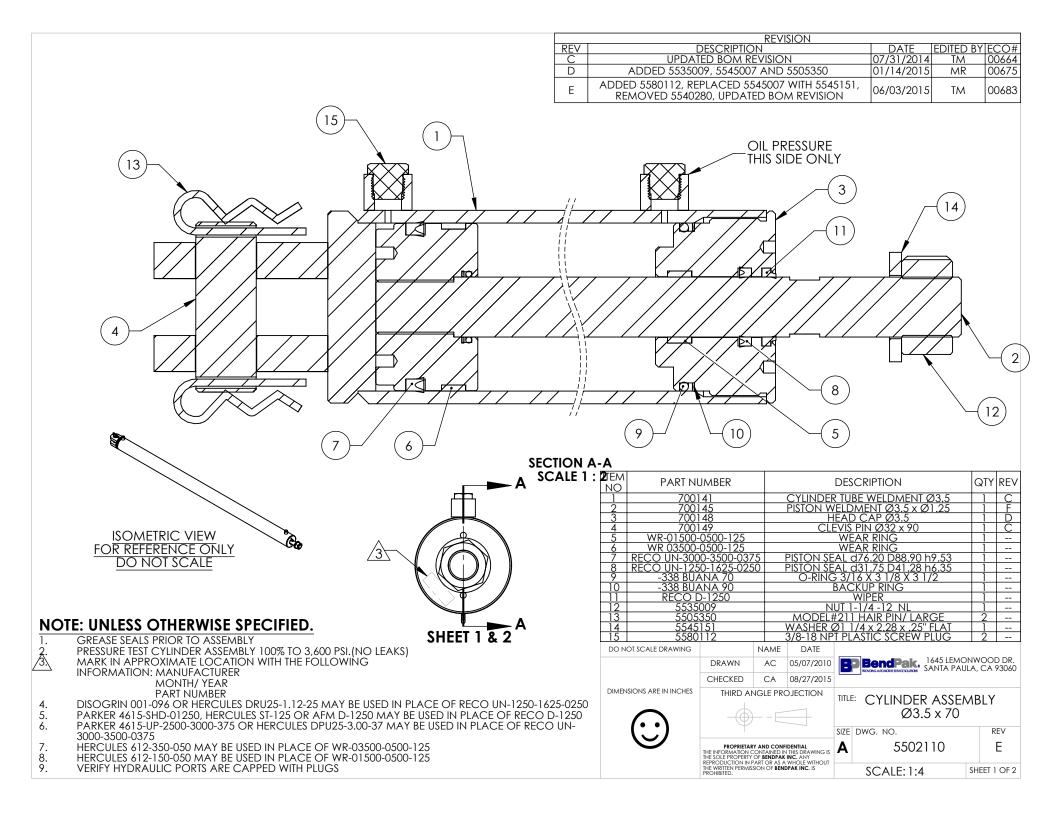

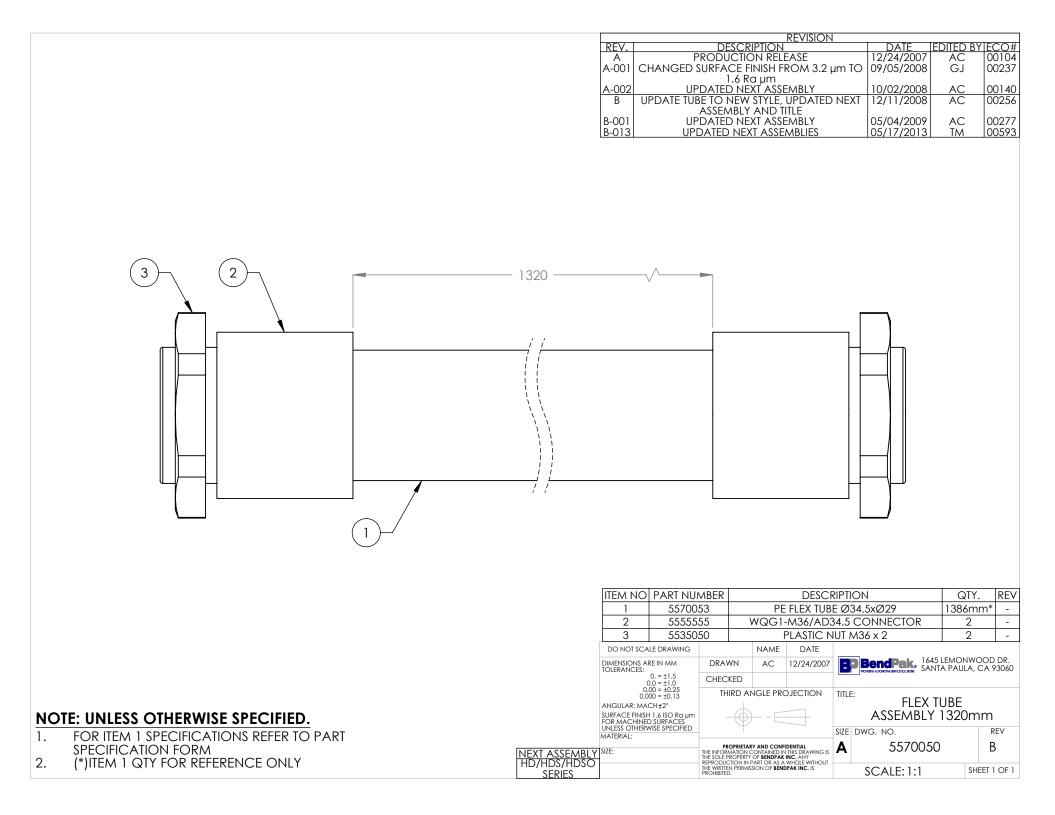

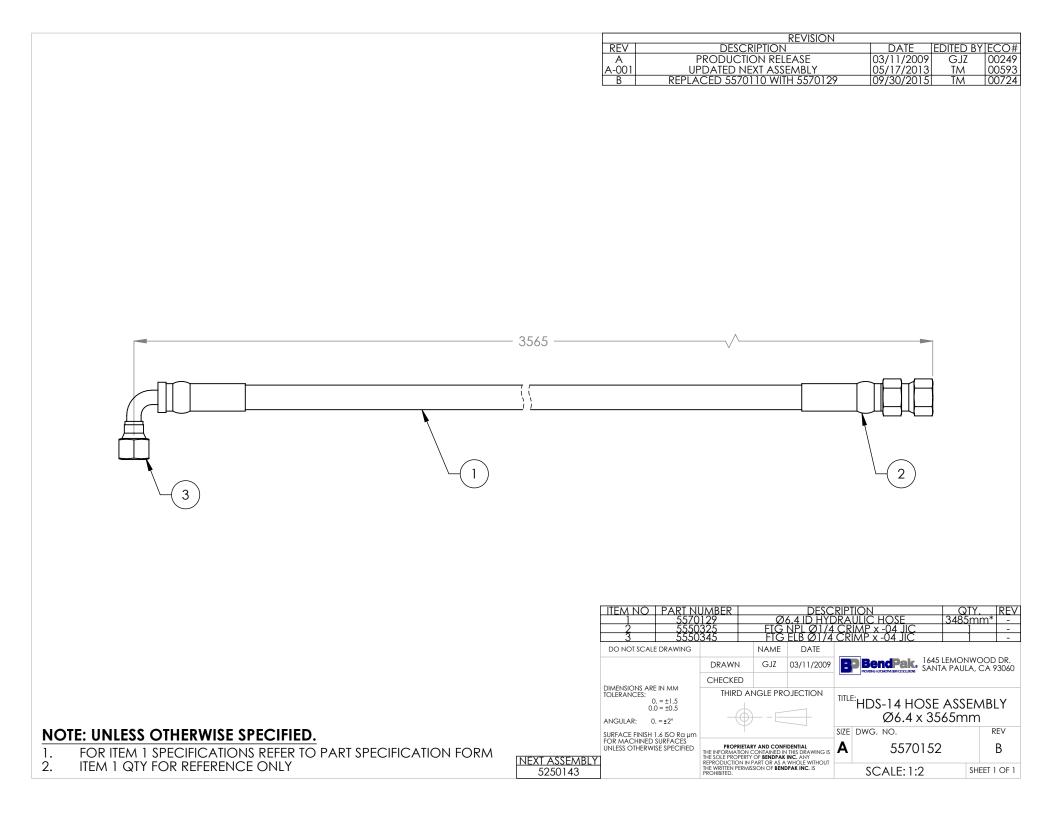



	REVISION REV DESCRIPTION DATE EDITED BY ECO#
	C UPDATED BOM REVISION 08/10/2010 IM 003881
	REVISION
	D-001 ROLLING BRIDGE BEAM WELD WAS 6 x 100-300 11/22/2010 TM 00427
	E UPDATED BOM REVISION, ADDED 5735352 12/29/2010 AC 00431
	E-001 ADDED 6mm WELD TO BOTTOM OF 5736163 08/10/2011 TM 00479
	ITEM NO PART NUMBER DESCRIPTION QTY REV 1 5701204 HDS-14 POWER SIDE RAMP 1 A 2 5620246 HDS/HDSO-14 SERIES END PLATE WELDMENT 2 B
	3 5700647 HDS-14 SERIES ROLLING BRIDGE BEAM 1 A 4 5731035 HDS/HDSO-14 FRONT RAMP SUPPORT PLATE 1 A
	5 5731020 HDS/HDSO-14 REAR RAMP SUPPORT PLATE 1 A 6 5731623 HDS/HDSO-14 REAR RAMP AIR SUPPORT PLATE 1 A
	7 5731036 HDS/HDSO-14 FRONT RAMP AIR SUPPORT PLATE 1 A
	5705000 HD-7/9/14, HDS/HDSO-14, XR-12000 ROLLING Loc Loc
(2) (3) (3)	10 5735084 HDS-14 CYLINDER SUPPORT PLATE 1 A
	11 5736161 HDS-14 RAMP SHEAVE BOTTOM PLATE 2 B 12 5736163 HDS-14 CYLINDER MOUNTING PLATE 1 A
	13 5746096 HDS-14 BOTTOM SPACER, RAMP SHEAVE 2 A 14 5700012 HOSE RETAINER 14 B
	15 5735352 SINGLE CLEVIS CYLINDER ALIGNMENT PLATE 1 A
	DO NOT SCALE DRAWING NAME DATE
	DIMENSIONS ARE IN MM TOLERANCES: 0 = 11/5
NOTE: UNLESS OTHERWISE SPECIFIED.	0. = ±1.5 0.0 = ±0.5 THIRD ANGLE PROJECTION
 BREAK AND DEBURR ALL SHARP EDGES 0.3mm REMOVE ALL WELD SPLATTER 	ANGULAR: 0. = ±2° SURFACE FINISH 1.6 ISO Ra µm FOR MACHINED SURFACES UNITES OTHERWISE SPECIFIED
APPLY #30 GRIT ALUMINUM OXIDE TO TOP	MATERIAL: BROPPIETARY AND CONFIDENTIAL SIZE DWG, NO. REV
SURFACE AFTER WELDING & BEFORE PAINTING	SIZE: THE INFORMATION CONTRIDENTIAL STAND CONFIDENTIAL STAND CONFIDENT
4. PAINT BENDPAK BLUE	THE XT ASSEMUELT Reference Reference SCALE: 1:25 SHEET 1 OF 3 5215072 PROHIBITED SCALE: 1:25 SHEET 1 OF 3

			REVISION		
	REV		EVISIONS AND NEXT		ITED BY ECO#
	F	ASS	EMBLY	04/25/2013	TM 00593
A Not	G	UPDATED B	om revision	03/31/2014	TM 00648
	Н		(2) 5735073	01/22/2016	JM 00741
	\				
	(5)				
		\bigcap			
	\sim	(4)			
	\sim \sim		_		
			7		
			\mathcal{I}		
	> ↓	≪			
	[· 0]	<u>_</u>			
		D			
(10)					
	প পৰ	<u>(12)</u>			
		\smile			
	ITEM	NO PART NUMBER	DESCRIPT		QTY REV
		5766077	HDS-14 CROSSTUBE, L	ARGE WINDOW	
	2		CROSSTUBE SAF AIR SAFETY T		2 C 1 C
	4	5755011	SMALL AIR SAFE		1 C
	5	5735023	HD-14 SERIES TOP CR		1 E
	6		HD/HDSO-14 BOTTOM (DS-14 CROSSTUBE END F		
	8		DS-14 CROSSTUBE END F		
	9	5620230 HE	DS-14 CROSSTUBE END F	PLATE #3 WELDM	ENT 1 F
	10) 5620231 HE	DS-14 CROSSTUBE END F		
		2 5760003 2 5735073	<u>HD-12/14 RA/</u> HDO/HDSO-14 CARR		1 D 2 B
		Z 3733073 DT SCALE DRAWING	NAME DATE		∠ D
		DRAWN	GJZ 11/12/2008	BondDale 1645 L	EMONWOOD DR.
			GJL 11/12/2000	BendPak. 1645 L SANTA	PAULA, CA 93060
	DIMENS	IONS ARE IN MM NCES: THIRD			
	TOLERA	0. = ±1.5	ANGLE PROJECTION TITLE:	HDS-14 CRO	SSTUBE
		$0.0 = \pm 0.5$	WFI	DMENT, LARC	
NOTE: UNLESS OTHERWISE SPECIFIED.		AR: 0. = ±2°		WG. NO.	REV
. BREAK AND DEBURR ALL SHARP EDGES 0.3mm	FOR MA	E FINISH 1.6 ISO Ra µm CHINED SURFACES OTHERWISE SPECIFIED PROPRIET			
		THE INFORMATIO	TARY AND CONFIDENTIAL ON CONTAINED IN THIS DRAWING IS RTY OF BENDPAK INC. ANY	5600276	H
B. PAINT BENDPAK BLUE	VEXT ASSEMBLY 5215597	REPRODUCTION THE WRITTEN PER/	IN PART OR AS A WHOLE WITHOUT	SCALE: 1:20	SHEET 1 OF 2
	521557/	PROHIBITED.		JCALL. 1.20	

N(1. 2. 3. PAINT BENDPAK BLUE

		REV	REVISION		DITED BY	
		A PRODUCTION	DESCRIPTION RELEASE, DERIVED FROM 5	DATE E	TM	00664
			ADDE (2) 5735073	01/22/2016	JM	00741
		0	//////////////////////////////////////	01/22/2010	5141	100/41
	\bigcirc					
		\bigcirc				
		(3)				
			\sim			
			S			
	\mathcal{H}	0.	r			
	/ / / /					
		11 🔨				
		₽ _∩ `	3			
	(• °¢	K C				
	0.	<u> </u>	2)			
\sim	\checkmark					
(10)						
	শ্ব					
		ITEM NO PART NUN 1 576603		SCRIPTION TUBE, SMALL WINDOW	4	TY REV
		2 573502	CROSSTU	BE SAFETY BLOCK		1 C 2 C
		3 575501	0 AIR SA	FETY TROUGH		Î Č
		4 57550	1 SMALL AIR	SAFETY TROUGH		1 C
		5 573502		<u>DP CROSS TUBE STRAF</u> TOM CROSS TUBE STR		
		6 573503 7 562022		END PLATE #1 WELD		1 C 1 C 1 E 1 E 1 G
		8 562022	P HDS-14 CROSSTUBE	END PLATE #2 WELD!		1 G
		9 562023	BO HDS-14 CROSSTUBE	END PLATE #3 WELD!	MENT	1 F
		10 562023	HDS-14 CROSSTUBE	END PLATE #4 WELD	MENT	1 F
		11 576000 12 573507		14 RAMP STOP CARRIAGE TIE BLOCK		1 D 2 B
		DO NOT SCALE DRAWING	NAME DATE			2 0
			DRAWN TM 08/18/2014	1645	LEMONWC	DOD DR.
		DIMENSIONS ARE IN MM TOLERANCES:	CHECKED	SAN	A PAULA, C	CA 93060
		0. = ±1.5 0.0 = ±0.5	THIRD ANGLE PROJECTION	TITLE:		
		ANGULAR: 0. = ±2°		HDS-14 CRC	OSSTUR	E
		SURFACE FINISH 1.6 ISO Ra µm		WELDMENT, SMA		
NOTE: UNLESS OTHERWISE SPECIFIED.		FOR MACHINED SURFACES UNLESS OTHERWISE SPECIFIED		SIZE DWG. NO.		REV
1. BREAK AND DEBURR ALL SHARP EDGES 0.3mm			PROPRIETARY AND CONFIDENTIAL	-		В
2. REMOVE ALL WELD SPLATTER	NEXT ASSEMBLY		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BENDPAK INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT	n 3000723		D
3. PAINT BENDPAK BLUE	5215663	1	REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BENDPAK INC. IS PROHIBITED.	SCALE: 1:18	SHE	EET 1 OF 2

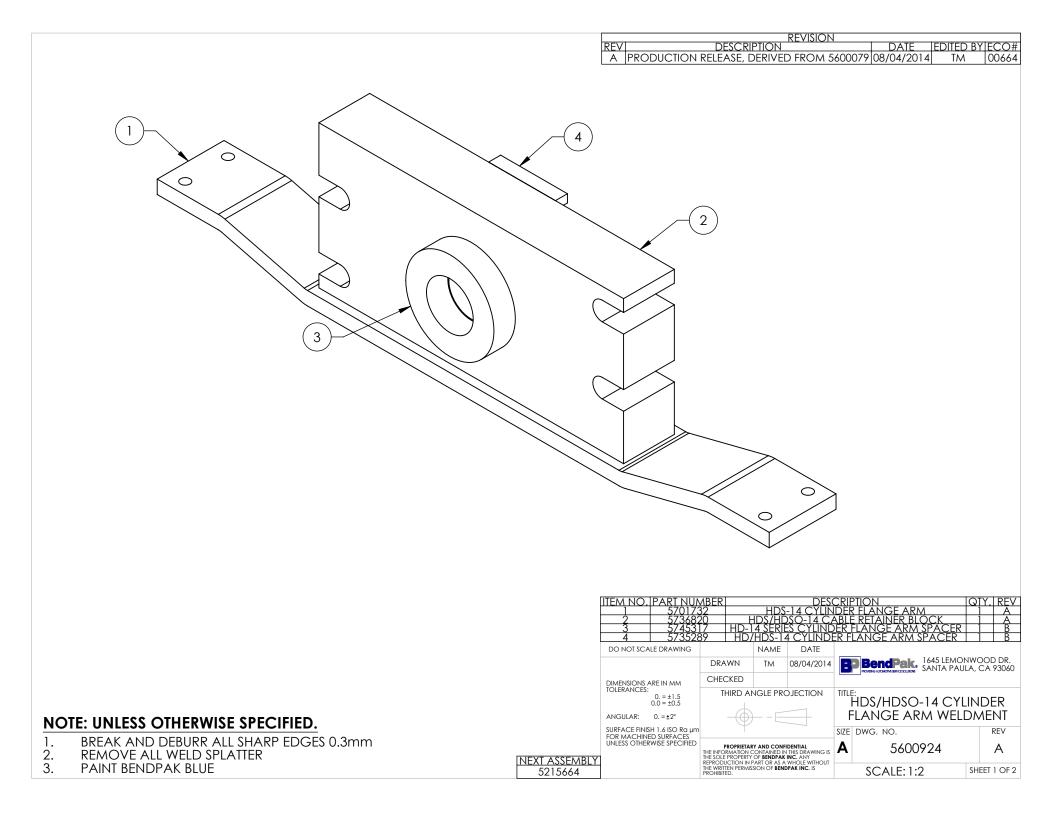

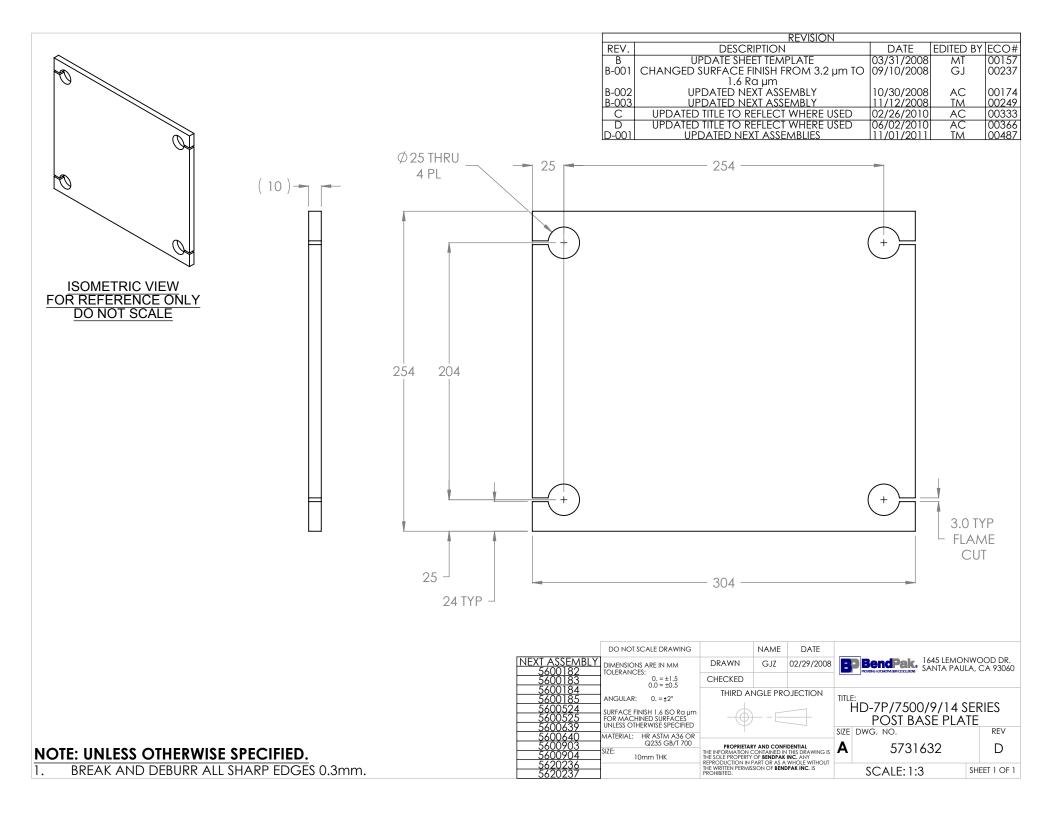



BENDPAK Number:	5900147
MRP Description:	SAFETY MANUAL ALI / SM 93-1
Date:	12/28/2010
ECO :	00431

1. Engineering Specification Application: ALI SAFETY MANUAL Petailed Description: A SAFETY MANUAL FUTOMOTIVE LIFT INSTITUTE ILIFT INST

2. Vendor Information			
Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			

\$10.00



BENDPAK Number:	5900152
MRP Description:	ALIGN OIM OPERATION INSPECTION & MAINTENANCE
Date:	12/28/2010
ECO :	00431


1. Er	1. Engineering Specification		
	<mark>icatio</mark> OPER	<u>n:</u> Ation Inspection & Mai	NTENANCE MANUAL
		escription:	
	American National Standard	<text><text><text><section-header><section-header><section-header><section-header><section-header><section-header><text><text><text><text></text></text></text></text></section-header></section-header></section-header></section-header></section-header></section-header></text></text></text>	
			f

2. Vendor Information			
			_
Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			



BENDPAK Number:	5900161
MRP Description:	HDS-14/14X INSTALLATION MANUAL
Date:	07/12/2013
ECO :	00593

1. Engineering Specification

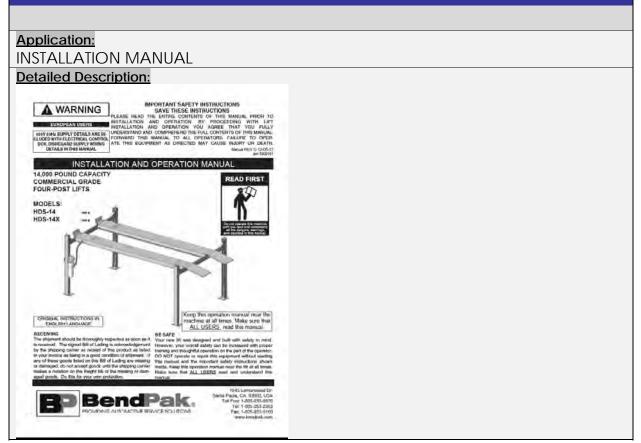

2. Vendor Information

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			



BENDPAK Number:	5905103
MRP Description:	WARNING ALI/WL 200
Date:	05/06/2013
ECO :	00593

1. Engineering Specification




2. Vendor Information			
Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			



BENDPAK Number:	5905151
MRP Description:	SAFETY TIPS CARD ALI-ST 90
Date:	12/28/2010
ECO :	00431

1. Engineering Specification

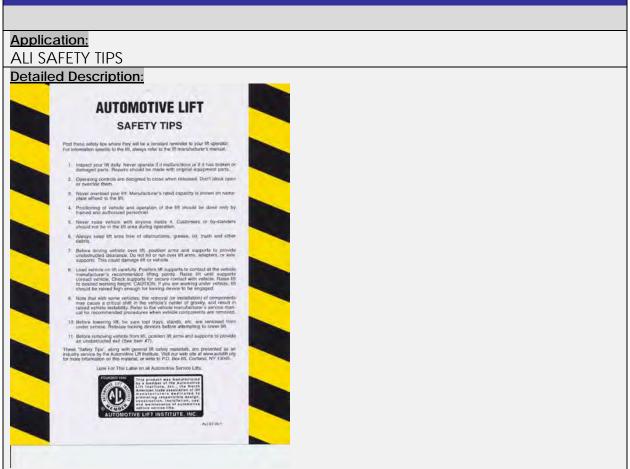

2. Vendor Information			
Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			



BENDPAK Number:	5905311
MRP Description:	BENDPAK LABEL; 4 x 38" WHITE INK
Date:	05/13/2015
ECO :	00689



2. Vendor Information			
Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			





www.bendpak.com

P/N 5905311



BENDPAK Number:	5905465
MRP Description:	MANUFACTURER LABEL
Date:	05/07/2013
ECO :	00593

1. Engineering Specification

Application:	
MANUFACTURER LABEL	
Detailed Description:	
MFD. BY BENDPAK INC.	
LIFT TYPE: SURFACE MOUNT CAPACITY: MED/HVY DTY POWER: ELECTRIC/HYDRAULIC ANCHORS: AS EQUIPPED INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY	<u>SIZE:</u> 5.125" L x 5.125" W (130mm x 130mm)
SHIPPING DAMAGE CLAIMS WHEN THIS EQUIPMENT IS SHIPPED, TITLE PASSES TO THE PURCHASER UPON RECEIPT FROM THE CARRIER. CONSEQUENTLY, CLAIMS FOR THE MATERIAL DAMAGED IN SHIPMENT MUST BE MADE BY THE PURCHASER AGAINST THE TRANSPORTATION COMPANY AT THE TIME SHIPMENT IS RECEIVED.	
PLEASE READ ALL OPERATORS/USERS MANUAL(S) PRIOR TO INSTALLATION AND OPERATION, UNDERSTAND AND COMPREHEND THE FULL CONTENTS OF EACH MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. DELIVER THE MANUAL(S) TO ALL OPERATORS. FAILURE TO OPERATE THIS EQUIPMENT AS DIRECTED MAY CAUSE INJURY OR DEATH.	
IMPORTANT NOTE: BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE CRITERIA AS PRESCRIBED BY ASTM E488 - 96(2003). LIFT BUYERS ARE RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR INTERNATIONAL BUILDING CODE (IBC).	
INTERNAL BAR CODE - FOR FACTORY AUDIT ONLY 34086	
BPK STYOT P20KVR X18576 HVY DTY/ GVR 832 THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.	
ENGINEERED BY BENDPAK INC USA MADE IN CHINA	

2. Vendor Information

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			

MFD. BY BENDPAK INC.

LIFT TYPE: SURFACE MOUNT CAPACITY: MED/HVY DTY

POWER: ELECTRIC/HYDRAULIC ANCHORS: AS EQUIPPED

INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SHIPPING DAMAGE CLAIMS

WHEN THIS EQUIPMENT IS SHIPPED, TITLE PASSES TO THE PURCHASER UPON RECEIPT FROM THE CARRIER. CONSEQUENTLY, CLAIMS FOR THE MATERIAL DAMAGED IN SHIPMENT MUST BE MADE BY THE PURCHASER AGAINST THE TRANSPORTATION COMPANY AT THE TIME SHIPMENT IS RECEIVED.

PLEASE READ ALL OPERATORS/USERS MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. UNDERSTAND AND COMPREHEND THE FULL CONTENTS OF EACH MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. DELIVER THE MANUAL(S) TO ALL OPERATORS. FAILURE TO OPERATE THIS EQUIPMENT AS DIRECTED MAY CAUSE INJURY OR DEATH.

IMPORTANT NOTE:

BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE CRITERIA AS PRESCRIBED BY ASTM E488 – 96(2003). LIFT BUYERS ARE RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR INTERNATIONAL BUILDING CODE (IBC).

INTERNAL BAR CODE - FOR FACTORY AUDIT ONLY 34086

BPKSTYOTP20KVRX18576HVY DTY/ GVR
832THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY
BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR
PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

ENGINEERED BY BENDPAK INC USA


MADE IN CHINA



BENDPAK Number:	5905556
MRP Description:	4-POST SAFETY DECAL
Date:	05/06/2013
ECO :	00593

1. Engineering Specification 4-POST SAFETY DECAL Detailed Description: SiZE: 23" L x 4" W (584m x 100mm)

2. Vendor Information					
Approved Vendor	Vendor Part #	Contact #	Preferred Vendor		
1)					

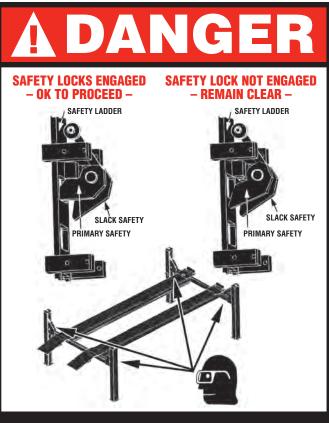

VISUALLY CONFIRM THAT ALL PRIMARY SAFETY LOCKS ARE ENGAGED BEFORE ENTERING WORK AREA.

Suspension components used on this lift are intended to raise and lower lift only and are NOT meant to be load-holding devises. Remain clear of elevated lift unless visual confirmation is made that all primary safety locks are fully engaged and the lift is LOWERED onto the safety locks. Refer to installation/operation manual for proper safety lock procedures and/or further instruction.

AWARNING

WIRE ROPE INSPECTION AND MAINTENANCE

- Lifting cables should be replaced every (3) three years or when visible signs of damage are apparent. DO NOT USE LIFT WITH DEFECTIVE OR WORN CABLES.
- Wire rope should be maintained in a well-lubricated condition at all times. Wire rope is only fully protected when each wire strand is lubricated both internal and external. Excessive wear will shorten the life of the wire rope. The factory suggests wire rope lubricant that penetrates to the core of the rope and provides long-term lubrication between each individual strand. In order to make sure that the inner layers of the rope remain well lubricated, lubrication should be carried out at intervals not exceeding three (3) months during operation.
- All sheaves and guide rollers in contact with the moving wire rope should be given regular visual checks for surface wear and lubricated to make sure that they run freely. This operation should be carried out at appropriate intervals generally not exceeding three (3) months during operation. For all sheave axles, the factory recommends standard wheel bearing grease. For all sheaves and/or guide rollers, the factory recommends 90-WT gear oil or similar heavy lubricant applied by any method including pump/spray dispensing, brush, hand and/or swabbing.

Failure to read, understand and follow these instructions may cause death or serious injury. Read and understand these instructions

before using lift.

IMPORTANT OPERATION / MAINTENANCE INSTRUCTIONS - PLEASE READ

TO RAISE LIFT

- Position vehicle tires at the center of each runway.
- \checkmark Set parking brake or use wheel chock to hold vehicle in position.
- Before raising vehicle, be sure all personnel are clear of lift and surrounding area. Pay careful attention to overhead clearances.
- ✓ Raise lift to desired height by pressing push button on power unit.
 ✓ Maintain visual contact with vehicle and surrounding area at all times while lowering lift.
- ✓ STOP IMMEDIATELY if load shifts or becomes unlevel.
- ✓ After vehicle is raised to desired height, lower lift onto the nearest safety lock. Do not allow cables to become excessively slack.
- ✓ ALWAYS INSURE ALL PRIMARY SAFETY LOCKS ARE ENGAGED before entering work area.

TO LOWER LIFT

- ✓ Before lowering vehicle, be sure all personnel, tools and equipment are clear of lift and surrounding area.
- Raise lift by pressing RAISE BUTTON on power unit. Elevate lift at least two inches to allow adequate clearance for locks to clear.
- Press push button AIR SAFETY VALVE and HOLD.
- ✓ Lower vehicle by pressing power unit lowering handle until lift has descended completely.
- When lowering lift PAY CAREFUL ATTENTION that all personnel and objects are kept clear.
- ✓ ALWAYS keep a visual line of site on lift AT ALL TIMES.
- ✓ ALWAYS make sure that ALL LOCKS are disengaged. If one of the locks inadvertently engages on descent, lift and/or vehicle may disrupt causing personal injury or death.

REQUIRED MONTHLY MAINTENANCE

- ✓ ALWAYS consult operation manual for factory recommended maintenance.
- Adjust lift cables to ensure lift raises level and safety locks engage simultaneously.
- Check all chain/cable connections, bolts and pins to insure proper mounting.
- ✓ Visually inspect safety locks for proper operation.
- ✓ Visually inspect concrete floor. DO NOT USE LIFT if concrete foundation shows signs of deterioration.
- ✓ Inspect all anchor bolts and retighten if necessary.
- ✓ Check columns for squareness and plumb.
- ✓ Inspect all bolts and/or fasteners making sure they are properly secured.
- ✓ Make a visual inspection of ALL MOVING PARTS and check for excessive signs of wear.
- ✓ Replace ALL FAULTY PARTS before lift is put back into operation.

A WARNING

- 1. WARNING: If cement anchor bolts are loose, or any component of the lift is found to be defective, DO NOT USE LIFT!
- 2. Never operate the lift with any person or equipment below.
- 3. Never exceed rated capacity.
- 4. Always insure safety locks are engaged before any attempt is made to work on or near vehicle.
- 5. Never leave lift in an elevated position unless the safety locks are engaged.
- Do not permit electric motor to get wet! Motor damage caused by dampness is not covered under warranty.

P/N 5905556



BENDPAK Number:	5905557
MRP Description:	MAX CAP DANGER 14K
Date:	05/06/2013
ECO :	00593

1. Engineering Specification

Detailed Description:	<u>SIZE:</u> 5" L x 4" W (127mm x 100mm)
ADANGER	
THE MAXIMUM LIFTING CAPACITY FOR THIS LIFT IS DESCRIBED BELOW	
Maximum Lifting Capacity 14,000 lbs. / 6350 kg	
Max. Lifting Cap. / Front of Lift Center 7000 lbs. / 3175 kg	
Max. Lifting Cap. / Rear of Lift Center 7000 lbs. / 3175 kg	
Exceeding the weight capacity of this lift can damage lift and/or property and may cause personal harm, injury or death to operators and/or bystanders. All vehicles MUST be positioned on lift with CENTER OF GRAVITY midway between adapters and/or centered on runways. Damage to lift due to overloading or misuse IS NOT covered under warranty.	
P/N 5905657	

2. Vendor Information					
Approved Vendor	Vendor Part #	Contact #	Preferred Vendor		
1)					



THE MAXIMUM LIFTING CAPACITY FOR THIS LIFT IS DESCRIBED BELOW

Maximum Lifting Capacity 14,000 lbs. / 6350 kg

Max. Lifting Cap. / Front of Lift Center 7000 lbs. / 3175 kg

Max. Lifting Cap. / Rear of Lift Center 7000 lbs. / 3175 kg

Exceeding the weight capacity of this lift can damage lift and/or property and may cause personal harm, injury or death to operators and/or bystanders. All vehicles MUST be positioned on lift with CENTER OF GRAVITY midway between adapters and/or centered on runways. Damage to lift due to overloading or misuse IS NOT covered under warranty.

P/N 5905557



BENDPAK Number:	5905940
MRP Description:	PRODUCT DATA LABEL
Date:	05/06/2013
ECO :	00593

1. Engineering Specification

Application:

PRODUCT DATA LABEL

Detailed Description:

Dotanou		<u></u>			
=}=			SA	NTA PAULA, WWW.BEND	
LIFT TYPE:	SURFACE MOUNT	CAP: MED/HVY DTY	MFG. BPK SEE DATA PL	ATE FOR PRODU	CT DETAILS
POWER: EL	ECTRIC/HYDRAULIC	INSTALL	ATION - SEE OWNERS G	UIDE OR CONTAC	T FACTORY
THAT ARE LO LISTING OR CERTIFIED F CONTACT TH	AFFECT INTENDED	PATH, AFFECT OPER /EHICLE ACCOMMODA T, THEN THE CERTIFIC INFORMATION PERTA	RIES OR CONFIGURATION I ATION OF THE LIFT, AFFEC ITION ARE USED ON THIS ATION OF THIS LIFT SHAL NINING TO CERTIFIED ATTA	T THE LIFT ELEC LIFT AND, IF THEY L BECOME NULL	TRICAL ARE NOT AND VOID.
ASTM E488 SEISMIC AN	- 96(2003). LIFT BUYE CHORING REQUIREM	RS ARE RESPONSIBLE MENTS SPECIFIED BY	TENERS MEETING THE CR E FOR ANY SPECIAL REGIN ANY OTHER AGENCIES AN NAL BUILDING CODE (IBC).	D/OR CODES SUC	AL AND/OR
	ENTS, OR PENDING	APPLICATIONS, OWNER	PRODUCT MAY BE SUBJEC D BY BENDPAK, INC. BENDPAK INC. USA		re united
<u>SIZE:</u> 2.3′	″Lx4.5″W	(58mm x 11	4mm)		

2. Vendor Information					
Approved Vendor	Vendor Part #	Contact #	Preferred Vendor		
1)					



SANTA PAULA, CA USA WWW.BENDPAK.COM PN 5905940

LIFT TYPE: SURFACE MOUNT CAP: MED/HVY DTY MFG. BPK SEE DATA PLATE FOR PRODUCT DETAILS

POWER: ELECTRIC/HYDRAULIC INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SAFETY INSTRUCTIONS: IF ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS THAT ARE LOCATED IN THE LOAD PATH, AFFECT OPERATION OF THE LIFT, AFFECT THE LIFT ELECTRICAL LISTING OR AFFECT INTENDED VEHICLE ACCOMMODATION ARE USED ON THIS LIFT AND, IF THEY ARE NOT CERTIFIED FOR USE ON THIS LIFT, THEN THE CERTIFICATION OF THIS LIFT SHALL BECOME NULL AND VOID. CONTACT THE PARTICIPANT FOR INFORMATION PERTAINING TO CERTIFIED ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS.

BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE CRITERIA AS PRESCRIBED BY ASTM E488 - 96(2003). LIFT BUYERS ARE RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR INTERNATIONAL BUILDING CODE (IBC).

THE MANUFACTURE, USE, SALE OF IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC. DO NOT REMOVE ENGINEERED BY BENDPAK INC. USA MADE IN CHINA



PART SPECIFICATION FORM

BENDPAK Number:	5905953
MRP Description:	LABEL D (4-POST LIFTS CE)
Date:	12/04/2015
ECO :	00724

1. Engineering Specification Application: DATA SERIAL TAG, 4-POST LIFTS, CE **Detailed Description:** Santa Paula, CA USA www.bendpak.com **BP** BendPak <u>SIZE:</u> 3.38" L x 3.38" W MODEL NUMBER SERIAL NUMBER (85.7mm x 85.7mm) LIFT CAPACITY DATE OF MFG. ROLLING JACK MAX CAP. MAX PSI / BAR VOLTAGE 110-240VAC, 50-60 Hz, 1 Ph 208-440VAC, 50-60 Hz, 3 Ph 208-240VAC, 50-60 Hz, 1 Ph 208-440VAC, 50-60 Hz, 3 Ph DANGER! Disconnect Power Before Servicing 4 (€ ∰ [H[PN 5905953

2. Vendor Information (Or for Reference)

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor	
1)				
2)				
OR BENDPAK ENGINEERING APPROVED EQUIVALENT				



MODEL NUMBER


SERIAL NUMBER

LIFT CAPACITY

DESCRIPTION

ROLLING JACK MAX CAP.

MAX PSI / BAR





<u>QCR: 344</u>

HDS-14 Packaging

This report is intended to show how to package an HDS-14

Report taken by: Adam Roberts Date: 10/9/15




Power side ramp will have: 1 crosstube, 1 parts box, cylinder installed and safety ladders.

Offside ramp will have: 1 crosstube 2 approach ramps, 4 posts, 4 top plates, 2 tire stops and 2 tire chocks.



2 posts will be positioned opposite of each other with 2 approach ramps on top. Note that there is cardboard in-between each spot where the parts contact each other. They are then secured with a steel strap.

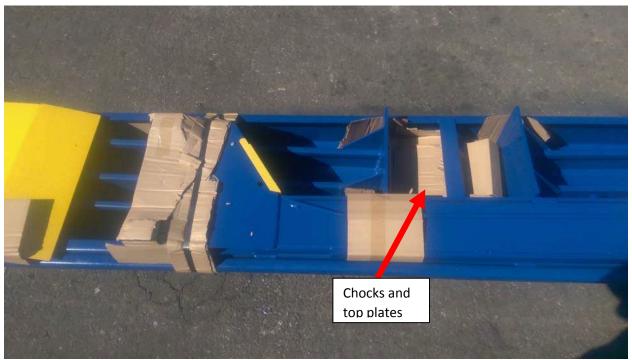

The crosstube will positioned as shown with the tire stops, top plates and tire chocks packaged in the middle.



Power side ramp will have 4 safety ladders fully wrapped in plastic with cardboard where it contacts to ramp.



The parts box will be placed in the center in front of the cylinder. Then the crosstube Is placed on top and secured with a steel strap



Once all items are secure, each section is wrapped with cardboard.



Thicker cardboard is then added to the bottom and both sides and secured with plastic straps. We are using a one piece cardboard that has folds for the sides.



Shown is all the thicker cardboard pieces added.



Finally fully wrap in plastic.



Here is the lift complete and stacked.



2016 CE-Approved 4 Post Lifts Colors & Graphics

12/31/15

CONFIDENTIAL INFORMATION.

You may not disclose, print, copy or disseminate this information. Unauthorized use is a violation of federal criminal law.

A **Total of 4** PN 5905311





Ali_4_Post_labels.pdf: (Order Labels from ALI)

BPK Post Branding Decal-Large_5905311.pdf:

Material: Clear Adhesive PET

Size: 4.25"W x 38"H

Thickness: 4 Mil

Finish: Polished

Ink: U.V. protected, Opaque White

Print Process: Silk Screen, 85 line-screen (Yellow color in file represents what should be clear PET material and SHOULD NOT print as Yellow ink. White area in file represents Opaque White ink.)

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

PN 5905556

4_Post_Safety_Decal.pdf:

Size: 4"W x 23"H

Material: White Vinyl Pressure Sensitive Adhesive Thickness: 4 Mil


Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

*



P/N 5905401 - Max Cap. Danger 7k P/N 5905695 - Max. Cap. Danger 7500 P/N 5905402 - Max Cap. Danger 9k P/N 5905557 - Max. Cap. Danger 14K P/N 5905406 - Max Cap. Danger 18k P/N 5905407 - Max. Cap. Danger 27K P/N 5905408 - Max. Cap. Danger 35K P/N 5905409 - Max. Cap. Danger 40K *Max. Cap. Danger.pdf: Size: 4"W x 5"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection



P/N 5905645 - NRTL_Lifting_Cap_Label_7K P/N 5905700 - NRTL_Lifting_Cap_Label_7500 P/N 5905650 - NRTL_Lifting_Cap_Label_9k P/N 5905665 - NRTL_Lifting_Cap_Label_14k P/N 5905675 - NRTL_Lifting_Cap_Label_18k P/N 5905680 - NRTL_Lifting_Cap_Label_27k P/N 5905685 - NRTL_Lifting_Cap_Label_35K P/N 5905690 - NRTL_Lifting_Cap_Label_40K

***DEPENDS ON LIFT MODEL AND CAPACITY**

*NRTL_Lifting_Cap_Label_.pdf:

Size: 4.5"W x 3.25"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

BP BendP	Pak.		PAULA, CA USA W-BENDPAK-COM
LIFT TYPE AURFACE MOUNT CAP.	REDAVY DTY MRD. BPK	SEE DATA PLATE R	OR PRODUCT DETAILS
POWER ELECTRICHYDRAULIC	INSTALLATION - SE	E OWNERS OLIDE O	OR CONTACT FACTORS
EARTY METRUCTIONS IF ATTACHNE THAT ARE LODGED IN THE LOAD INTH USTING CHAPTECT INTRODUCTION CERTIFIED FOR USE ON THIS UPT THE CONTROLTINE PARTICIPANT FOR INFO CONTROLTINE PARTICIPANT FOR INFO	ARREST OF BRACION OF TH ACCOMMODATION ARE L IN THE CERTIFICATION OF T RMATION PERTAINING TO C	HE LIFT AFRECT THE USED ON THIS UFT AS THIS UFT SHALL BECK	LATELEUTROAL ID IS THEY AVE NOT ONE NALL AND YOD
BENCHRIK LIFTS AND SUPPLIED WITH C ASTAL KAN - MODOR UST BUYERS AR SEBAC ANCHORING REQUIREMENTS UNFORM BUILDING CODE (USC) ANOC	E RESPONSIBLE FOR ANY SPECIFIED BY ANY OTHER	SPECIAL REGIONAL S AGENCIES AND/OR O	TRUCTURAL ANDOR
THE MANAFACTURE LOF, MALE OR MI STATES PATENTS, OR PENCING APPLIC			WE OR MORE LINETT
DO NOT REMOVE FINCE	ASTIST OF DELEDAY	APT 11CA	MADE IN CHINA

PN 5905940

Product_Data_Label_5905940-New.pdf: Size: 4.5"W x 2.3"H

Material: White Vinyl Pressure Sensitive Adhesive Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection



PN 5905953


2015_Serial_Tag-D-5905953.jpg:

Size: 3"W x 3"H


Material:Material: 2 Mil. Matte Silver Polyester (Flex-PSE)

Print using thermal transfer printer with resin ribbon Ink: 1 Color-Black



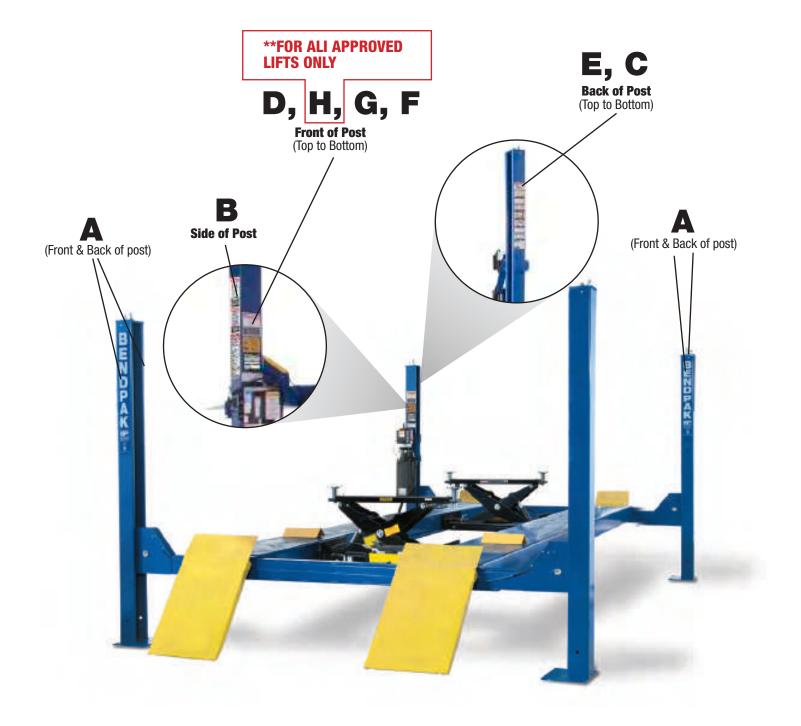

4 Post Lifts Packaging

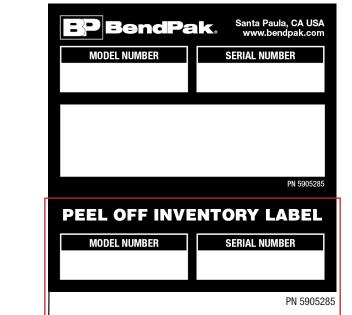

Serial_Tag_New-2015_Peel_Off-5905285.jpg: Size: 3"W x 3"H Material:Material: 2 Mil. Matte Silver Polyester (Flex-PSE) Print using thermal transfer printer with resin ribbon Ink: 1 Color-Black

Do not remove back sheet of this portion to prevent from sticking completely as shown in image.





2016 NON-CE 4 Post Lifts Colors & Graphics

MODELS: HD-9SW HDS-40 HD-9SWX HDS-40X HD-14T HD-9AE

12/31/15

CONFIDENTIAL INFORMATION.

You may not disclose, print, copy or disseminate this information. Unauthorized use is a violation of federal criminal law.

A **Total of 4**





Ali_4_Post_labels.pdf: (Order Labels from ALI)

BPK Post Branding Decal-Large_5905311.pdf:

PN 5905311

Material: Clear Adhesive PET

Size: 4.25"W x 38"H

Thickness: 4 Mil

Finish: Polished

Ink: U.V. protected, Opaque White

Print Process: Silk Screen, 85 line-screen (Yellow color in file represents what should be clear PET material and SHOULD NOT print as Yellow ink. White area in file represents Opaque White ink.)

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

PN 5905556

4_Post_Safety_Decal.pdf:

Size: 4"W x 23"H

Material: White Vinyl Pressure Sensitive Adhesive Thickness: 4 Mil


Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

*



P/N 5905401 - Max Cap. Danger 7k P/N 5905695 - Max. Cap. Danger 7500 P/N 5905402 - Max Cap. Danger 9k P/N 5905557 - Max. Cap. Danger 14K P/N 5905406 - Max Cap. Danger 18k P/N 5905407 - Max. Cap. Danger 27K P/N 5905408 - Max. Cap. Danger 35K P/N 5905409 - Max. Cap. Danger 40K

BP Bendl		SANTA PAULA, CA USA WWW.BENDPAK.COM
		DATA PLATE FOR PRODUCT DETAILS
POWER ELECTRICHYDRAULIC	INSTALLATION - SEE OW	NERS OLIDE OR CONTACT FACTORS
THAT ARE LOCATED IN THE LOAD HAT UNTING CHARTECT MITENDED VIEW CORTIFIED FOR USE ON THIS UPT TO CONTACT THE PARTICIPANT FOR INF CRICONFICIENT OF MODIFYING CO	OLE ACCOMMODATION ARE USED I ION THE CERTIFICATION OF THIS (CRIMITION PERTAINING TO CERTIFI	ON THIS UP TAND IF THEY AVE NOT
BENCHAR LIFTS ARE SUPPLIED WITH ASTAL EAM - MICROBILIET BUPPLIED SEBAIC ANCHORING REQUIREMENT UNFORM BUILDING CODE (USC) AND	INE RESPONSIBLE FOR ANY SPECI IS SPECIFIED BY ANY OTHER AGEN	AL REGIONAL STRUCTURAL AND CR ICIES AND OR CODES SUCH AS THE
THE MANA FACTURE LISE, SALE OR I STATES PATENTS, OR PENDING APPL		
	CINEERED BY RENDRAK INC.	

PN 5905940

*Max. Cap. Danger.pdf: Size: 4"W x 5"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection



P/N 5905645 - NRTL Lifting Cap Label 7K P/N 5905700 - NRTL_Lifting_Cap_Label_ 7500 P/N 5905650 - NRTL_Lifting_Cap_Label_9k P/N 5905665 - NRTL_Lifting_Cap_Label_14k P/N 5905675 - NRTL_Lifting_Cap_Label_18k P/N 5905680 - NRTL_Lifting_Cap_Label_27k P/N 5905685 - NRTL_Lifting_Cap_Label_35K P/N 5905690 - NRTL_Lifting_Cap_Label_40K

*NRTL_Lifting_Cap_Label_.pdf:

Size: 4.5"W x 3.25"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

*DEPENDS ON LIFT MODEL AND CAPACITY

Product_Data_Label_5905940-New.pdf:
Size: 4.5"W x 2.3"H
Material: White Vinyl Pressure Sensitive Adhesive
Thickness: 4 Mil
Ink: U.V. protected CMYK 2/C Process
Finish: Polished
Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection




PN 5905952

2015_Serial_Tag-C-5905952.jpg:


Size: 3"W x 3"H Material: Material: 2 Mil. Matte Silver Polyester (Flex-PSE) Print using thermal transfer printer with resin ribbon

Ink: 1 Color-Black



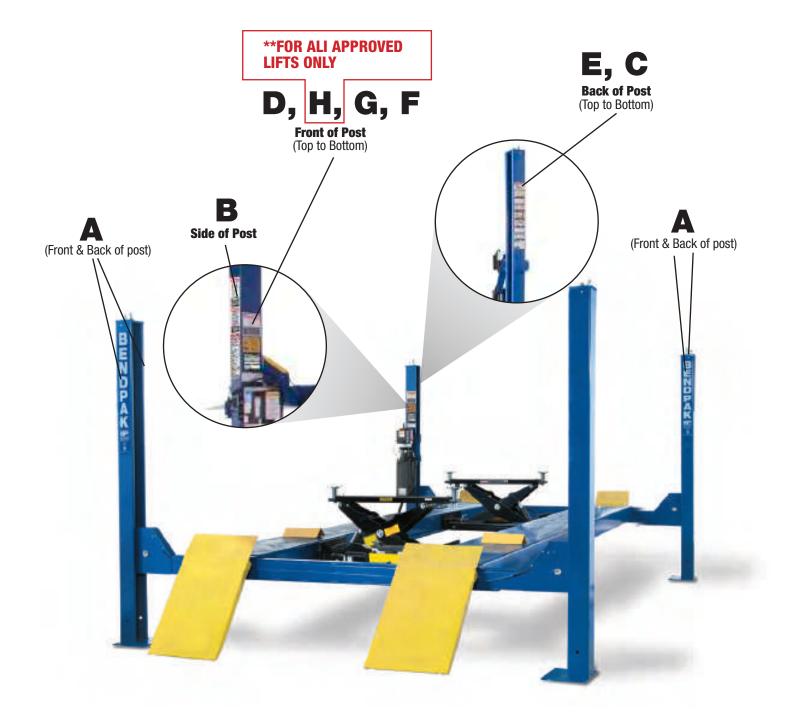

4 Post Lifts Packaging

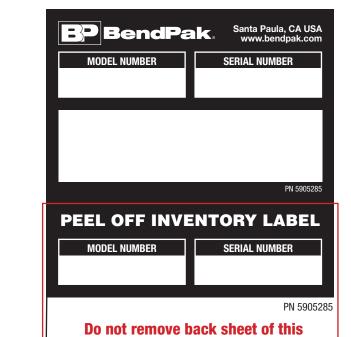

portion to prevent from sticking

Serial_Tag_New-2015_Peel_Off-5905285.jpg: Size: 3"W x 3"H Material:Material: 2 Mil. Matte Silver Polyester (Flex-PSE) Print using thermal transfer printer with resin ribbon Ink: 1 Color-Black

