



YY26 Specification

Product name: Snow Electric Bicycle

Item No.: YY26

Catalog

Product Specifications

Frame specifications

Motor specification

Controller Specifications

Battery Specifications

Charger specifications

Tire specification

Packing dimensions

Loading quantity


Product Specifications



Size (mm)	L*W*H 1980*650*1120
Foldable Size (mm)	No foldable
wheel base (mm)	1250
Handlebar height (mm)	1120
Saddle height (mm)	Min Height 900 Max Height 1050
Mini. ground distance (mm)	130
G.W (kg)	About 31
Front Fork	suspension fork
Rear suspension	NO
Display	3.5 inch middle LCD intelligent instrument: speed display, power display, gear display Display, total mileage display, single mileage display, fault display, mobile phone charging USB interface


Derailleur	Shimano 7S
The motor gear	0-5 level (level 0 does not work, level 1 is slow and level 5 is the fastest)
Waterproof level	IP54
Application	16-65 Years old Height:1.8- 2.3 Meter
Usage	Snow, beach, road, city
Max Load (kg)	150
Maximum Permissible Gradient	40°
Max Speed (km/H)	EU 25km/h Other 40km/h
Assistant Power range(km)	80-90
Pure Electric range(km)	40-45
Certificate	CE UL KC FCC PSE ROHS
Environment	-20-40°C Below the elevation 1500M

Frame Parameter

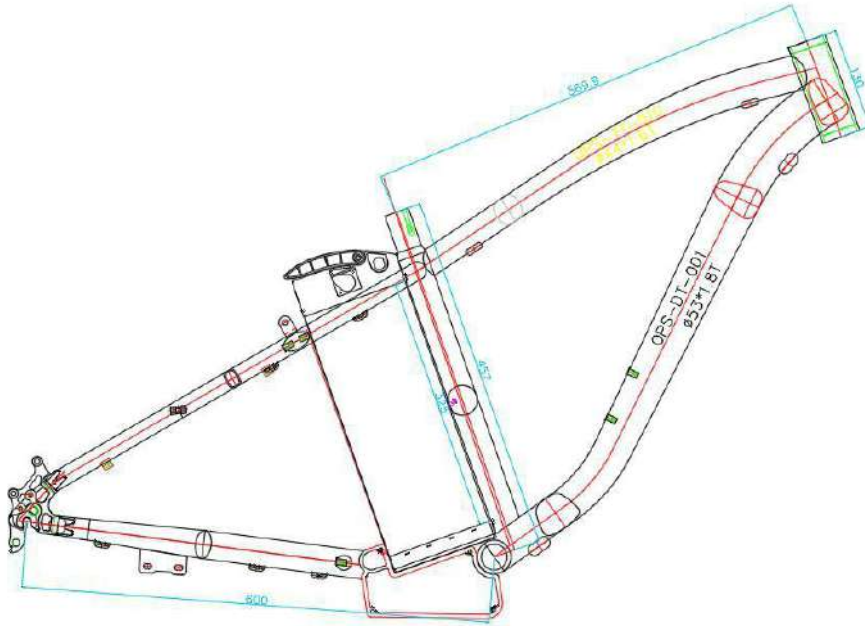

Material	6061 Aluminum alloy frame
Tube heigh	18 inch
After opened files	175 mm
Frame coding	A unique frame code (engraved on the frame head tube)
Weight (KG)	about 4

Motor Parameter

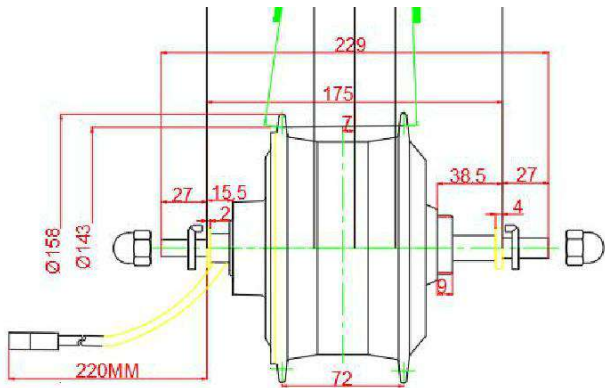

Motor name	Permanent magnet DC brushless hub motor
Motor Type	20 inch Brushless Motor
Weight (KG)	About 4.5
Rated Voltage	DC48V
Rated power	750W
Maximum power	850W
Non-load current	≤1A
no-load speed	320±10 r/min
Max Current	25A
Efficiency	>80%
Max Torque (N.M)	>65
Waterproof Rate	IP54

Controller Specification



Name	Brushless DC Controller
Item	48V 750W six tube controller
Coding	X863-AXC003C
Size (mm)	L*W*H 120*50*30
Weight (KG)	About 0.3
Rated Voltage (V)	48
Negative pressure value	$40 \pm 1V$
Max Current (A)	22 ± 1
Rated operational current	6 A
Waterproof Rate	IP54

Battery Specification




Name	Ternary lithium battery
Size (mm)	L*W*H 403*138*95
Weight (kg)	About 5.2
Voltage (V)	48
Related Power (WH)	720
Related Capacity (AH)	15
Combining Form	13S5P
Cells QTY (PCS)	78
Cell Specification	18650 Automobile power cell
maximum charging voltage	DC54.6 V
Standard Charge Current	3A
Max Charge Current	4-8A
mA	25A
Protect system	Yes: Overcharge, overdischarge high temperature, overcurrent short-circuit, charging port 0V
Storage	Use namely filling Storage is replenished every 2 months
Certification	MSDS UN38.3 CE
Global Insurance	PICC

Charger specification



Name	Lithium battery charger
Voltage	AC100-240V 50/60HZ
output voltage (V)	54.6
output current (A)	3
charger plug	DC 2.1
Green light	The power indicator or battery is fully charged
Red light	Charging
Weight (KG)	About 0.6
Certification	SAA CE UL PSE ROHS FCC KC
Waterproof grade	IP54

Tire Specification

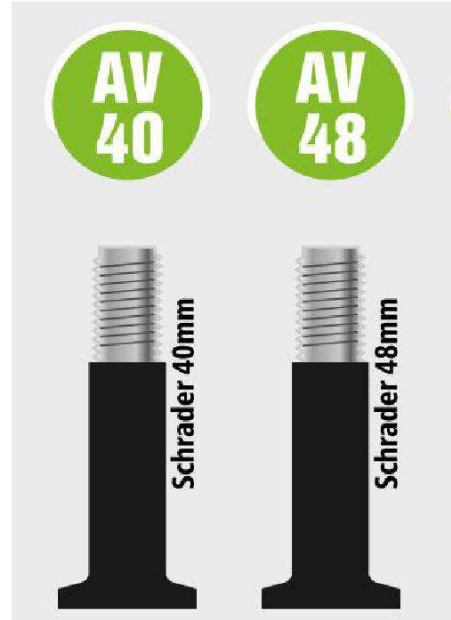



Name	Mountain bike bicycle tires
Tire Size	26*4.0
Tube Size	26*4.0
Tire +Tube weight	About 2.2 KG
Gas mouth style	48mmAV
Air pressure	270-440Kpa 40-65PS

Packing Information



Packing Way	Carton + pearl cotton
Packing Method	85% SKU Packing
Packing Size (CM)	L*W*H 158*32*80
Weight (KG)	34
Stacking height limit	4 layers
Handling/Storage	recommended that two people carry, no rolling, no upside down, moisture-proof and sunscreen

Container QTY

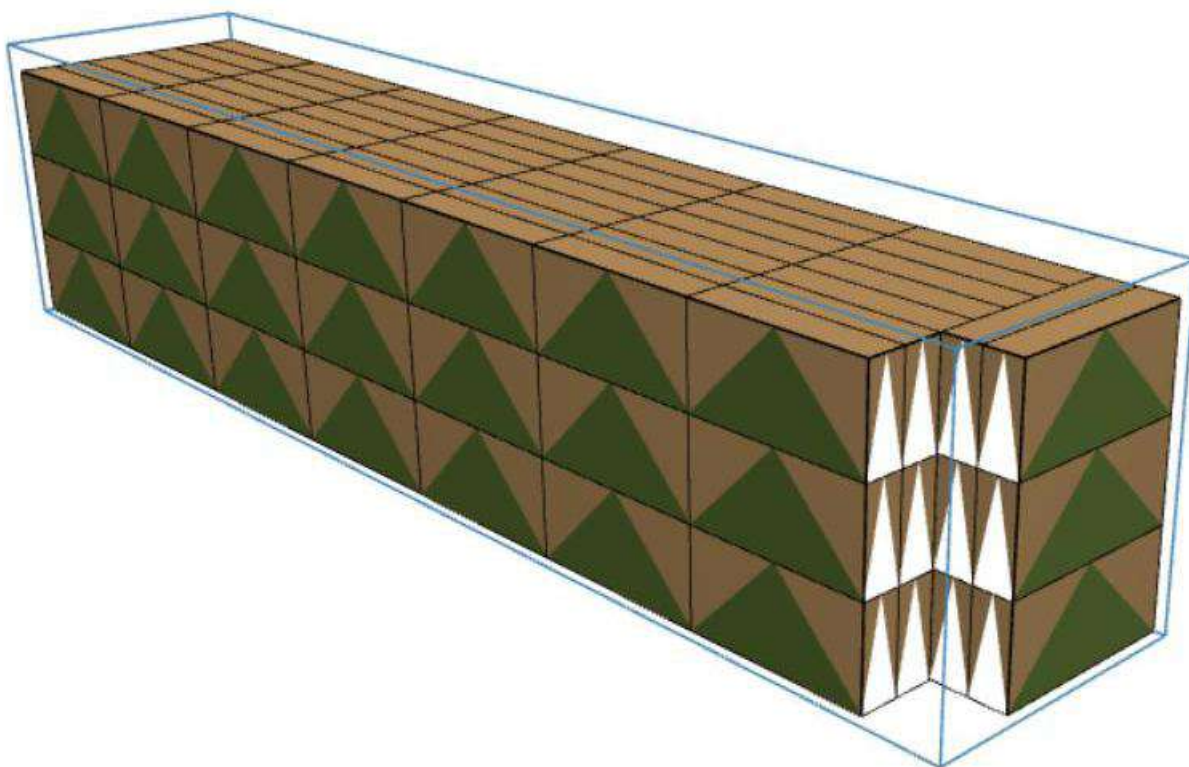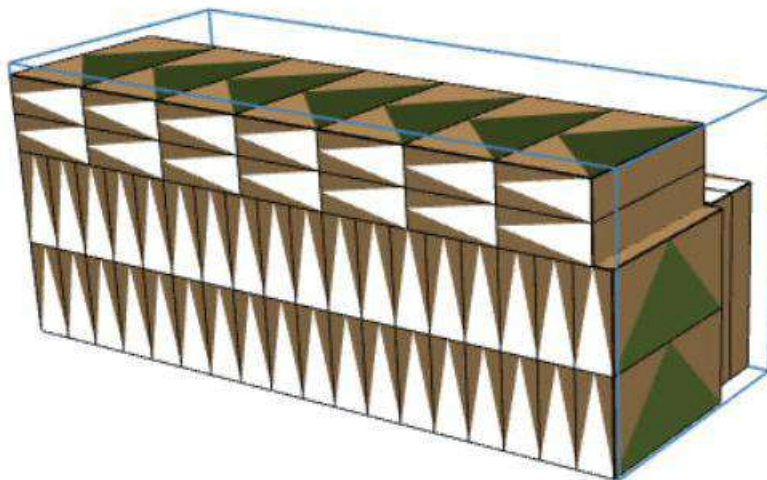

20 GP	64 PCS
40HQ	153 PCS



SAMEBIKE