

## Operating Instruction and safety manual



### Air Body Saw(Professional)

Model No.: 7601



#### IMPORTANT:

Upon receipt of the product,  
read and follow all safety rules,  
operating instructions before first use it.  
And retain this manual for future reference.



#### Residual risks

Even when the tool is used as prescribed it is not possible to eliminate all residual risk factors. The following hazards may arise in connection with the tool's construction and design:

1. Damage to lungs if an effective dust mask is not worn.



2. Damage to hearing if effective hearing protection is not worn.



3. Health defects resulting from vibration emission if the power tool is being used over longer period of time or not adequately managed and properly maintained.

4. Wear eye protection.



2013

2014



# Technical Data

---

Free speed.....	5000CPM
Stroke length.....	3/10”(8mm)
Avg. air consumption.....	2cfm(57.0l/min)
Operating pressure.....	90psi(6.3bar)
Weight.....	1.58Lbs(0.72kgs)
Air inlet size.....	1/4”
A weighted sound pressure level.....	82.9dB(A)
Sound power level.....	93.9dB(A)
Vibration in the handle.....	3.5m/s <sup>2</sup>

## Important Safety Rules

---

1. Always wear safety goggles or glasses.
2. Always ensure machine is switched off before connecting air supply.
3. Disconnect any machine from the air supply before changing blades or discs, and before servicing any type of machine.
4. Always keep your air tool clean and lubricated. Daily lubrication is essential to avoid internal corrosion and possible failure.
5. Do not wear watches, rings bracelets or loose clothing when using air tools.
6. Using only light weight coil hoses from a tool to the wall or compressor coupling. Do not fit quick change couplings onto the machine as vibration can cause the coupling to fail.
7. Do not overload the machine. Allow the tool to operate at its optimum speed for maximum efficiency.
8. Do not increase the air pressure above the manufacturers recommended level, as excessive overload can cause the machine casing to split. Also this creates excessive wear on moving parts and possible failure.
9. In the interests of safety and possible damage to the machine/operator, always ensure that the machine has stopped before putting it down after use.
10. Always ensure that the work piece is firmly secured leaving both hands free to control the machine.
11. Always ensure that the accessories such as blades, discs, sockets, etc. are rated/designed for use with the machine. Also correctly and securely fastened before connecting the machine to the air supply.
12. When grinding, sanding or cutting always wear an appropriate face mask or respiratory equipment.

## Operating Instructions

---

### Description

---

- This lightweight, slim designed tool cuts curved surfaces and tight circles with ease
- Cuts all types of aluminum, plastic, fiberglass, and metal
- Tool comes with a safety trigger to prevent accidental starts
- 1/4" Inlet fitting
- Includes extra blade and stop

## Air supply

---

1. Ensure air valve (or trigger) is in the “off” position before connecting to the air supply.
2. You will require an air pressure of 90psi, and an air flow according to specification.
3. **WARNING!** Ensure the air supply is clean and does not exceed 90psi while operating the tool..  
Too high an air pressure and unclean air will shorten the product life due to excessive wear, and may be dangerous causing damage and/or personal injury.
4. Drain the air tank daily. Water in the airline will damage the tool
5. Clean air inlet filter weekly.
6. Line pressure should be increased to compensate for unusually long air hoses (over 8 metres).  
The minimum hose diameter should be 1/4” I.D. and fittings must have the same inside dimensions.
7. Keep hose away from heat, oil and sharp edges. Check hose for wear, and make certain that all connections are secure.

## Lubrication

---

An automatic in-line filter-regulator-lubricator is recommended (Fig4) as it increases tool life and keeps the tool in sustained operation. The in-line lubricator should be regularly checked and filled with air tool oil.

Proper adjustment of the in-line lubricator is performed by placing a sheet of paper next to the exhaust ports and holding the throttle open approximately 30 seconds. The lubricator is properly set when a light stain of oil collects on the paper. Excessive amounts of oil should be avoided.


In the event that it becomes necessary to store the tool for an extended period of time (overnight, weekend, etc.), it should receive a generous amount of lubrication at that time. The tool should be run for approximately 30 seconds to ensure oil has been evenly distributed throughout the tool. The tool should be stored in a clean and dry environment.

- It is most important that the tool be properly lubricated by keeping the air line lubricator filled and correctly adjusted. Without proper lubrication the tool will not work properly and parts will wear prematurely.
- Use the proper lubricant in the air line lubricator. The lubricator should be of low air flow or changing air flow type, and should be kept filled to the correct level. Use only recommended lubricants, specially made for pneumatic applications. Substitutes may harm the rubber compounds in the tools O-rings and other rubber parts.

## IMPORTANT!!!

If a filter/regulator/lubricator is not installed on the air system, air operated tools should be lubricated at least once a day or after 2 hours work with 2 to 6 drops of oil, depending on the work environment, directly through the male f

**Fig 4.**

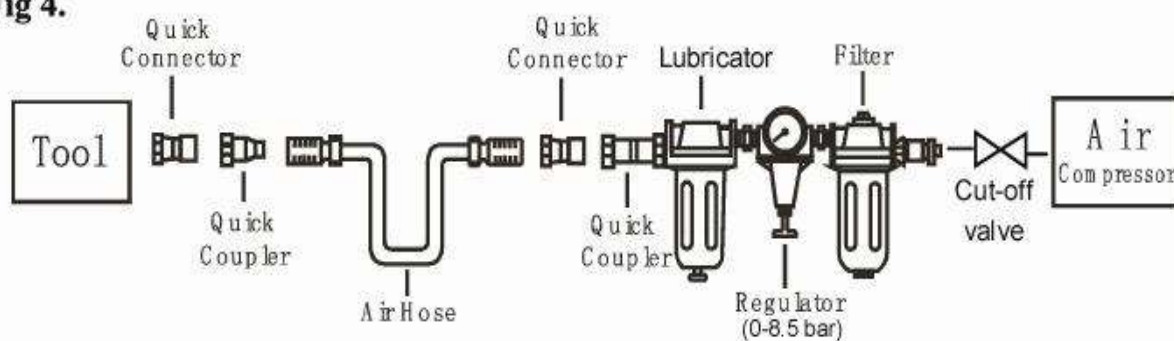

## Loading and operation

**WARNING:** Ensure you read, understand and apply safety instructions before use.

1. Connect the air body saw to the air hose .
2. Pls press trigger to operate the tool
3. Ensure the air supply is clean and does not exceed 90psi while operating the tool. Too high an air pressure and unclean air will shorten the product life due to excessive wear, and may be dangerous causing damage or personal injury.  
DO NOT use any additional force upon the tool.  
DO NOT allow tool to free run for an extended period of time as this will shorten its life.  
Turn on the air compressor and allow it to build up pressure once all of jobs done.Adjust the air compressor's regulator or the supply line regulator to 90PSI.Squeeze trigger gently.

## Maintenance

**WARNING:** Disconnect wrench from air supply before changing accessories, servicing or performing maintenance. Replace or repair damaged parts. *Use genuine parts only. Non-authorised parts may be dangerous and will invalidate the warranty.*

1. Lubricate the air body saw daily with a few drops of air tool oil dripped into the air inlet
2. Check and top up the gearbox by removing grub screw located under the impact head
3. Clean the body saw after use. DO NOT use worn, or damaged sockets.
4. Loss of power or erratic action may be due to the following:
  - a) Excessive drain on the air line. Moisture or restriction in the air pipe. Incorrect size or type of hose connectors. To remedy check the air supply and follow instructions in chapter 3.
  - b) Grit or gum deposits in the wrench may also reduce performance. If your model has an air strainer (located in the area of the air inlet), remove the strainer and clean it. Flush the wrench out with gum solvent oil or an equal mixture of SAE No 10 oil and paraffin. Allow to dry before use.
5. When not in use, disconnect from air supply, clean wrench and store in a safe, dry, childproof location.

# Trouble Shooting


The following form lists the common operating system with problem and solutions. Please read the form carefully and follow it.

**⚠ WARNING:** If any of the following symptoms appears during your operating, stop using the tool immediately, or serious personal injury could result. Only a qualified persons or an authorized service center can perform repairs or replacement of tool.

Disconnect tool from air supply before attempting repair or adjustment. When replacing O-rings or Cylinder, lubricate with air tool oil before assembly.

PROBLEMS	POSSIBLE CAUSES	REMEDIES
Tool runs at normal speed but loses under load	<ul style="list-style-type: none"> <li>■ Motor parts worn.</li> <li>■ Cam clutch worn or sticking due to lack of lubricant.</li> </ul>	<ul style="list-style-type: none"> <li>■ Lubricating clutch housing.</li> <li>■ Check for excess clutch oil. Clutch cases need only be half full. Overfilling can cause drag on high speed clutch parts, ie. a typical oiled/lubricated wrench requires 1/2 ounce of oil.</li> </ul> <p><b>GREASE LUBRICATED:NOTE:</b> Heat usually indicates insufficient grease in chamber. Severe operating conditions may require more frequent lubrication.</p>
Tool runs slowly. Air flows slightly from exhaust	<ul style="list-style-type: none"> <li>■ Motor parts jammed with dirt particles</li> <li>■ Power regulator in closed position</li> <li>■ Air flow blocked by dirt.</li> </ul>	<ul style="list-style-type: none"> <li>■ Check air inlet filter for blockage.</li> <li>■ Pour air tool lubricating oil into air inlet as per instructions.</li> <li>■ Operate tool in short bursts quickly reversing rotation back and forth where applicable.</li> <li>■ Repeat above as needed. If this fails return to service centre.</li> </ul>
Tools will not run. Air flows freely from exhaust	<ul style="list-style-type: none"> <li>■ One or more motor vanes stuck due to material build up.</li> </ul>	<ul style="list-style-type: none"> <li>■ Pour air tool lubricating tool into air inlet.</li> <li>■ Operate tool in short bursts of forward and/or reverse rotation where applicable.</li> <li>■ Tap motor housing gently with plastic mallet.</li> <li>■ Disconnect supply. Free motor by rotating drive shank manually where applicable</li> <li>■ If tool remains jammed return to service centre.</li> </ul>
Tool will not shut off	<ul style="list-style-type: none"> <li>■ 'O' rings throttle valve dislodged from seat inlet valve.</li> </ul>	<ul style="list-style-type: none"> <li>■ Replace 'O' ring or return to service centre.</li> </ul>
Note: Repairs should be carried out by a qualified person.		

# Exploding view & Parts list

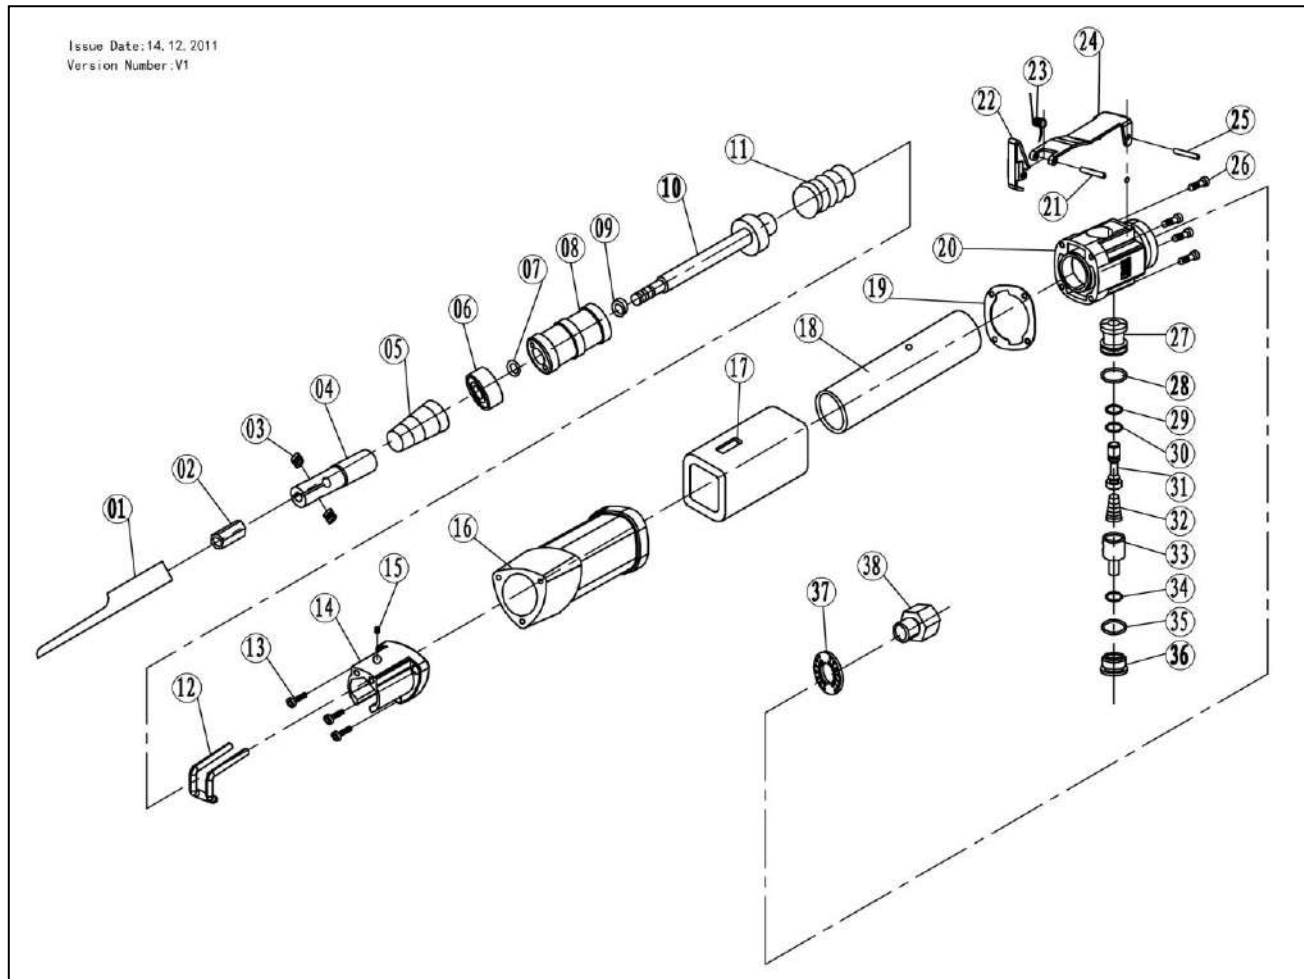

No.	Description	Qty.	NO	Description	Qty.	No.	Description	Qty.	No.	Description	Qty.
1	Blade	1	11	Spring	1	21	Bolt 2.5×16	1	31	Valve stem	1
2	Bearing	1	12	Safety nozzle	1	22	Trigger Pin	1	32	Spring	1
3	Bolt M6×8	2	13	Bolt M3 × 12	3	23	Spring	1	33	Adjuster	1
4	Blade chuck	1	14	Safety set	1	24	Trigger	1	34	O-ring 5.6×1.8	1
5	Spring	1	15	Bolt M3×3	2	25	Bolt 3×16	1	35	O-ring 11.5×1.6	1
6	Cylinder Cap	1	16	Housing	1	26	Bolt M3×18	4	36	Screw cap	1
7	O-ring 9.5×1.8	1	17	Jacket	1	27	Valve Bushing	1	37	Washer	1
8	Piston	1	18	Cylinder	1	28	O-ring 12.5×1.8	1	38	Air inlet	1
9	bumper	1	19	Gasket	1	29	O-ring 4×1.5	1			
10	Piston assemble	1	20	End cap	1	30	O-ring 4.5×1.8	1			

**Note:** If you need spare parts of this model, pls feel free to contact us or the distributor where you bought this tool.  
Tks!

[illegible]